
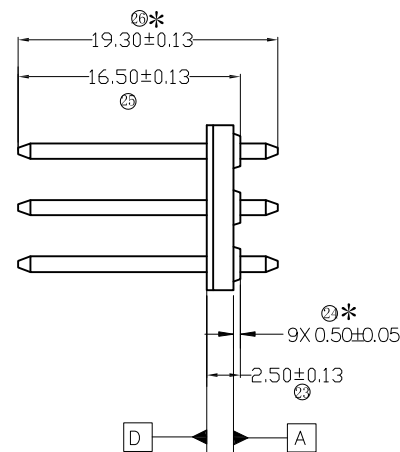
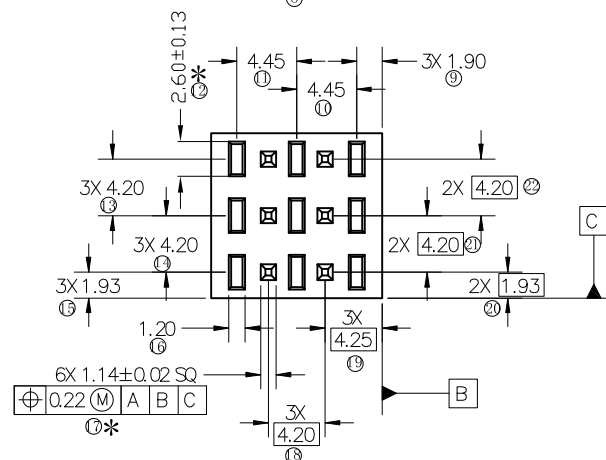



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/20/20	
A		UPDATE SPEC.	4/23/20	AY/IW
B		UPDATE DIM.	8/10/20	AY/TL
C		ADDED TOLERANCES	10/6/20	AY/TL
D		ADDED TOLERANCES	9/1/21	LH/TL
E		UPDATE DRAWING	11/17/21	LH/TL
F		UPDATE DRAWING	11/18/21	WX/TL

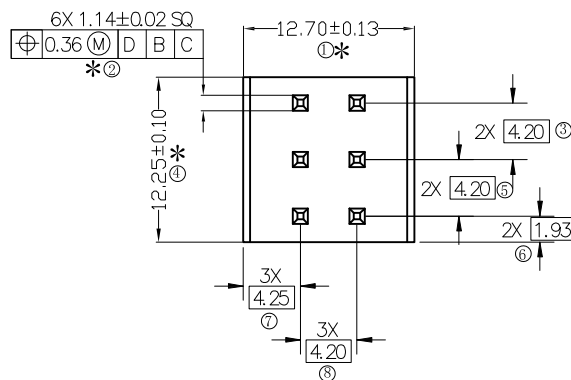

SPECIFICATIONS:

Material:

Housing: UL94V-0 RATED GLASS FILLED GRY PBT, Color: Grey

Contacts: Brass, C260

Plating:

150u" Tin-Plated High-temperature

50u" min Nickel underplating over all

Electrical:

Current rating: 7 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC For 1 Minute

Temperature Rating:

-40°C to +125°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

MM	ANGLE
X.X ± 0.20	
X.XX ± 0.13	± 3°
X.XXX ± 0.10	

DRAWN	AY	1/20/20
CHECKED	IW	1/20/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE				.165 [4.20] DUAL ROW PIN HEADER				TIN PLATED			
SIZE		PART NO.						REV.			
X				42PH2-06-T-.110/.760				F			
REF:		S00111C		SCALE:		NTS		SHEET		1 OF 1	