



GT2-1001 (CW)	6.5"	Woofers	20 Oz	4 Ohm	40W
	8"	Woofers	24 Oz	4 Ohm	60W
	10"	Woofers	30 Oz	4 Ohm	80W
	12"	Woofers	40 Oz	4 Ohm	100W
	15"	Woofers	50 Oz	4 Ohm	160W



GT2-1002 (EW)	6.5"	Woofers	20 Oz	4 Ohm	40W
	8"	Woofers	20 Oz	4 Ohm	50W
	10"	Woofers	30 Oz	4 Ohm	80W
	12"	Woofers	30 Oz	4 Ohm	100W
	15"	Woofers	50 Oz	4 Ohm	160W



GT2-1003 (LW)	6.5"	Sub-woofers	24 Oz	40W
	8"	Sub-woofers	30 Oz	60W
	10"	Sub-woofers	40 Oz	100W
	12"	Sub-woofers	50 Oz	120W



GT2-1004 (NW)	6.5"	Sub-woofers	24 Oz	50W
	8"	Sub-woofers	30 Oz	80W
	10"	Sub-woofers	40 Oz	100W
	12"	Sub-woofers	50 Oz	120W



GT2-1005 (HW)	6.5"	woofers	20 Oz	50W
	8"	woofers	20 Oz	60W
	10"	woofers	30 Oz	75W
	12"	woofers	30 Oz	80W

SPEAKER



GT2-1006 (RW)	8"	Sub-woofer	40 Oz	75W
	10"	Sub-woofer	40 Oz	80W
	12"	Sub-woofer	65 Oz	100W
	15"	Sub-woofer	65 Oz	125W



GT2-1007 (CW-B)	8"	woofer	30 Oz	4Ohm	80W
	10"	woofer	40 Oz	4Ohm	100W
	12"	woofer	50 Oz	4Ohm	150W
	15"	woofer	60 Oz	4Ohm	200W



GT2-1011

6" 2 way car speaker 4 ohm 80W 4-10 Oz



GT2-1012

6" 3 way car speaker 4 ohm 80W 4-10 Oz



GT2-1013

6x9" 3 way car speaker
4 ohm 180W 8-30 Oz



GT2-1014

5" Dualcone car speaker
4 ohm 50W 4-10 Oz



GT2-1015

4" Dualcone car speaker
4/8 ohm 20W 2-4 Oz



1



2



3



4



5



6



7



8



9



10



11



12



13



14



15



16



17

	Model	Inch	Max Power(w)
1	YD166-01	6.5	10
2	YD120-01	5	8
3	YD103-01F	4	5
4	YD103-02Y	4	5
5	YD103-03	4	5
6	YD93-01d	3.5	4
7	YD93-02s	3.5	2
8	YD78-01d	3	3
9	YD78-02s	3	1
10	YD78-03F	3	1
11	YD66-01	2.5	1
12	YD58-01	2.25	0.5
13	YD50-01	2	0.5
14	YD40-01	1.5	0.25
15	YDH78-01	3	1.5
16	YDH58-01	2.25	1
17	YDH50-01	2	0.5



GT2-1016
5" 60W 4/8 ohm 10 Oz

GT2-1017
8" 150W 4/8 ohm 20 Oz



GT2-1022
8" 150W 4/8 ohm 20 Oz

GT2-1023
12" 250W 4/8 ohm 30 Oz



GT2-1018
6.5" 80W 4/8 ohm 24 Oz

GT2-1019
8" 200W 4/8 ohm 30 Oz



GT2-1024
12" 300W 4/8 ohm 40 Oz

GT2-1024A
15" 350W 4/8 ohm 60 Oz



GT2-1020
8" 100W 4/8 ohm 10 Oz

GT2-1021
10" 150W 4/8 ohm 20 Oz




GT2-1025
8" 150W 4/8 ohm 20 Oz

GT2-1025A
10" 200W 4/8 ohm 30 Oz



GT2-1026
6.5" 150W 4/8 ohm 30 Oz

GT2-1026A
10" 250W 4/8 ohm 40 Oz

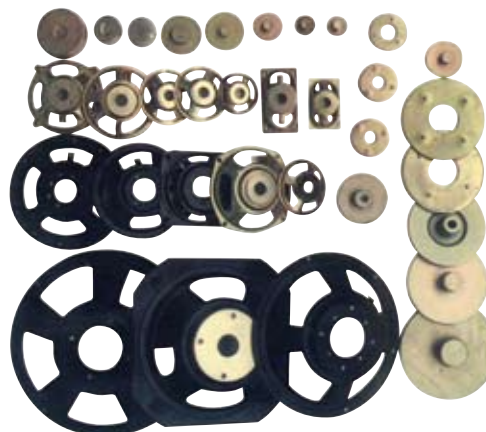

Speaker Parts

TWEETER



GT2-1027
(YDQG60-01F)
1" 20W 4 ohm 1.3Oz



GT2-1028
(YDQG60-02F)
1" 20W 4 ohm 1.3Oz



GT2-1029
(YDN103-01S)
4" 40W 4/8 ohm



GT2-1030
(YDQG60-02SF)
1" 20W 4/8 ohm



GT2-1031
(XH50-4)
2" Telephone speaker
16 ohm 0.4W
magnet NdFeB: $\phi 12 \times 1.5$ mm
Dimension: $\phi 50 \times 9$ mm



GT2-1032
(XH50-5)
2" Telephone speaker
8 ohm 1W
magnet NdFeB: $\phi 12 \times 2$ mm
Dimension: $\phi 50 \times 17.5$ mm



GT2-1033
(TW201)
Mylar Dome Tweeter
8 ohm 10W



GT2-1034
(TW202)
Mylar Dome Tweeter
8 ohm 5W



GT2-1035
(TW206)
Mylar Dome Tweeter
8 ohm 5W



GT2-1036
(TW207)
Mylar Dome Tweeter
8 ohm 5W



GT2-1037
(TW303)
Titanium Dome Tweeter
8 ohm 20W $\phi 104$ mm



GT2-1038
(TW304)
Titanium Dome Tweeter
 $\phi 108$ mm



GT2-1039
(TW308)
Titanium Dome Tweeter
 $\phi 102$ mm



GT2-1040
(TW311)
Mylar Dome Tweeter
 $\phi 80$ mm



GT2-1041
(TW313)
Mylar Dome Tweeter
 $\phi 85$ mm



GT2-1042
(TW315)
Mylar Dome Tweeter
 $\phi 94$ mm



GT2-1043
(TW108)
Satellite Tweeter
4 ohm 10W
20mm Aluminum Voice Coil
50x8mm Ferrite Magnet



GT2-1044
(TW110)
Satellite Kevlar Tweeter
4 ohm 15W
25mm Kapton Voice coil
25x3.5mm NdFeB Magnet



GT2-1045
Frequency Response: 4.5-20KHz
Sensitivity: 103dB(1w/1m)
Power RMS/MAX: 75/150w
Impedance: 4/8 Ohm
Size: $\phi 80$ mm



GT2-1046
Frequency Response: 4.5-20KHz
Sensitivity: 102dB(1w/1m)
Power RMS/MAX: 75/150w
Impedance: 4 Ohm
Size: $\phi 85 \times 85$ mm

GT2-1047

Frequency Response: 5-20KHz
Sensitivity: 105dB(1w/1m)
Power RMS/MAX: 75/150w
Impedance: 4 Ohm
Size: 73X73mm



GT2-1053

Size: 127X330mm



GT2-1048

Frequency Response: 4.5-20KHz
Sensitivity: 105dB(1w/1m)
Power RMS/MAX: 70/150w
Impedance: 4 Ohm
Size: 63X63mm



GT2-1054

Frequency Response: 4.8-20KHz
Sensitivity: 102dB(1w/1m)
Power RMS/MAX: 80/120w
Impedance: 4 Ohm
Size: Φ 42mm



GT2-1049

Frequency Response: 4.5-20KHz
Sensitivity: 105dB(1w/1m)
Power RMS/MAX: 70/150w
Impedance: 4 Ohm
Size: 70X70mm



GT2-1055

Frequency Response: 5-20KHz
Sensitivity: 102dB(1w/1m)
Power RMS/MAX: 60/120w
Impedance: 4 Ohm
Size: Φ 45mm



GT2-1050

Frequency Response: 1.2-23KHz
Sensitivity: 95dB(1w/1m)
Power RMS/MAX: 75/150w
Impedance: 4/8 Ohm
Size: 187X80mm



GT2-1056

Frequency Response: 3.5-20KHz
Sensitivity: 102dB(1w/1m)
Power RMS/MAX: 80/120w
Impedance: 4/8 Ohm
Size: Φ 37mm



GT2-1051

Frequency Response: 4.5-20KHz
Sensitivity: 105dB(1w/1m)
Power RMS/MAX: 75/150w
Impedance: 4 Ohm
Size: 134X70mm



GT2-1057

Frequency Response: 3.5-20KHz
Sensitivity: 102dB(1w/1m)
Power RMS/MAX: 80/120w
Impedance: 4 Ohm
Size: Φ 37mm



GT2-1052

Frequency Response: 4.5-20KHz
Sensitivity: 95dB(1w/1m)
Power RMS/MAX: 75/150w
Impedance: 4 Ohm
Size: 87X88mm



GT2-1058


Frequency Response: 3-20KHz
Sensitivity: 100dB(1w/1m)
Power RMS/MAX: 80/150w
Impedance: 4/8 Ohm
Size: Φ 33mm



NOISE FILTER & CROSSOVER



GT2-1061 (SH501)
5AMP
LC NOISE FILTER

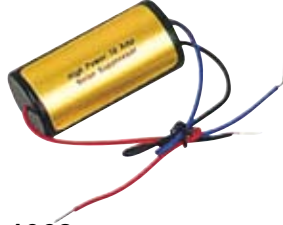

GT2-1062 (SH502)
10AMP
LC NOISE FILTER



GT2-1063 (SH504)
15AMP OR 20AMP
Isolation Transformer
With Black RC Wire



GT2-1064 (SH505)
Adjustable HI/LOW Convertor
Max Impedance 10Kohm,
With RCA Jack Dual Channel
Full DC Isolation Adjustable Attenuation



GT2-1065 (SH601B)
150W 3 way 12dB/OCT
FREQ.: 800-5KHz
IMPEDANCE: 8 Ω



GT2-1066 (SH602)
100W 1WAY 12dB/OCT
FREQ.: 120HZ
IMPEDANCE: 4 Ω



GT2-1067 (SH606)
100W 3WAY 6dB/OCT
FREQ.: 1k~5KHz
IMPEDANCE: 8/4 Ω



GT2-1068 (SH608)
150W 3WAY 12dB/OCT
FREQ.: 2K~4KHz
IMPEDANCE: 8 Ω



GT2-1069 (SH611)
100W 2WAY 12dB/OCT
FREQ.: 2.5KHz
IMPEDANCE: 8 Ω



GT2-1070 (SH617)
120W 2WAY W.: 6dB/OCT
T.: 12dB/OCT
FREQ.: 5.5KHz
IMPEDANCE: 4/8 Ω



GT2-1071 (ME617A)
120W 2WAY 12dB/OCT
FREQ.: 3.5KHz
IMPEDANCE: 4 Ω



GT2-1072 (SH618)
120W 3WAY 12dB/OCT
FREQ.: 750~5KHz
IMPEDANCE: 4/8 Ω



GT2-1073 (SH618A)
120W 3WAY 12dB/OCT
FREQ.: 750~5KHz
IMPEDANCE: 4 Ω



GT2-1074 (SH690)
100W 3WAY
W.: 12dB/OCT M.: 6dB/OCT T.: 6dB/OCT
FREQ.: 6K~10KHz
IMPEDANCE: 8 Ω



GT2-1075 (ME698)
100W 3 way 12dB/OCT
FREQ.: 1.25K-5KHz,
IMPEDANCE: 8 Ω

HORN TWEETER



GT2-1081

Input Power: 30W
Impedance: 8Ω
S.P.L.: 95dB
Magnet Dimension: 70x32x10cm
Material: ABS Plastic
Frequency Range: 1500~18000Hz
Voice Coil: φ25mm
Dimensions: 87x87x70mm



GT2-1082

Impedance: 8Ω
Power Rating: 50W
Frequency Range: 1500~18000Hz
S.P.L.: 105dB
Voice Coil: φ25mm
Magnet Dimension: 80x40x15cm
Dimensions: 128mm



GT2-1083

Impedance: 8Ω
Power Rating: 50W
Frequency Range: 1500~18000Hz
S.P.L.: 105dB
Voice Coil: φ25mm
Magnet Dimension: 80x40x15cm
Dimensions: 110x110mm



GT2-1084

Frequency Range: 1.5~20KHz
Sensitivity: 90dB(1W/1M)
Power: 100W (Max). 4Ω
Voice Coil: φ25.4mm
Magnet Dimension: 70x32x10cm
Size: φ98mm
Material: AL



GT2-1085

Frequency Range: 1.5~20KHz
Sensitivity: 90dB(1W/1M)
Power: 100W (Max). 8Ω
Voice Coil: φ25.4mm
Magnet Dimension: 70x32x10cm
Size: φ98mm
Material: AL



GT2-1086

Frequency Range: 1.5K~20KHz
Sensitivity: 97dB
Power: 150W (Max)
Voice Coil: φ25.4mm
Magnet Dimension: 70x32x10cm
Impedance: 4Ω
Size: 80x80mm
Material: AL



GT2-1087

Frequency Range: 1.5K~20KHz
Sensitivity: 103dB
Power: 200W (Max)
Voice Coil: φ45mm
Magnet Dimension: 90x45x15cm
Impedance: 8Ω
Size: 100x100mm
Material: AL



GT2-1088

Material: ABS Plastic
Color: Black
Size: 44x39x58mm
Power Rating: 10W
Rated Voltage: 6~12V
S.P.L.: 115dB



GT2-1089

Material: ABS Plastic
Color: Black
Size: 80x75x60mm
Power Rating: 20W
Rated Voltage: 6~12V
S.P.L.: 112dB



GT2-1090

Material: ABS Plastic
Color: Black
Size: F80x80mm
Power Rating: 20W
Rated Voltage: 6~12V
S.P.L.: 115dB



GT2-1091

Material: ABS Plastic
Color: Black
Size: F100x105mm
Power Rating: 20W
Rated Voltage: 6~12V
S.P.L.: 115dB



GT2-1092

Material: ABS Plastic
Color: Black
Size: F87x86mm
Power Rating: 20W
Rated Voltage: 6~12V
S.P.L.: 112dB



GT2-1093

Woofer: 6.5"
Input Voltage: 100V RMS Power: 6W
Response Frequency: 150Hz~15kHz
Sensitivity(1m/1W): 91dB
Ceiling Drilling Dimension: φ156mm
Dimension: φ200x110mm
Case Material: ABS
Meas/QTY: 63x44x23cm/10pcs



GT2-1094

Woofer: 6.5"
Input Voltage: 100V RMS Power: 10W
Response Frequency: 150Hz~16kHz
Sensitivity(1m/1W): 92dB
Ceiling Drilling Dimension: φ190mm
Dimension: φ230x100mm
Case Material: ABS
Meas/QTY: 58x50x26cm/10pcs



GT2-1095

Woofer: 6.5"
Input Voltage: 100V RMS Power: 10W
Response Frequency: 150Hz~15kHz
Sensitivity(1m/1W): 92dB
Ceiling Drilling Dimension: φ178mm
Dimension: φ230x100mm
Case Material: ABS
Meas/QTY: 58x50x26cm/10pcs



GT2-1096

Woofer: 6.5"
Input Voltage: 100V RMS Power: 10W
Response Frequency: 160Hz~15kHz
Sensitivity(1m/1W): 92dB
Ceiling Drilling Dimension: φ155mm
Dimension: φ180x130mm
Case Material: ABS
Meas/QTY: 68x39x21cm/10pcs

HORN SPEAKER & ELECTRONIC SIREN



GT2-1101 (DU-15)



GT2-1102 (DU-25)



GT2-1103 (DU-35)



GT2-1104 (DU-50)



GT2-1105 (DU-75)



GT2-1109 (DU-150)



GT2-1108 (DU-120)



GT2-1106 (DU-80)



GT2-1107 (DU-100)



Model No.	Input Power	Impedance	S.P.L. (1w/1m)	Frequency (Hz)	Dimensions	Magnetic
GT2-1101	12/25W	16Ω	≥ 104dB	300-5000	Φ100×70	Φ80×40×17mm
GT2-1102	25/35W	16Ω	≥ 106dB	200-5000	Φ120×75	Φ120×60×20mm
GT2-1103	35/50W	16Ω	≥ 106dB	200-5000	Φ114×80	Φ110×60×17mm
GT2-1104	50/60W	16Ω	≥ 106dB	200-5000	Φ114×100	Φ110×60×17mm
GT2-1105	75/90W	16Ω	≥ 106dB	200-5000	Φ114×110	Φ110×60×20mm
GT2-1106	80/100W	16Ω	≥ 106dB	200-5000	Φ120×110	Φ110×60×20mm
GT2-1107	100/120W	16Ω	≥ 106dB	200-5000	Φ120×120	Φ120×60×34mm
GT2-1108	120/140W	16Ω	≥ 104dB	200-5000	Φ130×100	Φ60×30mm
GT2-1109	150W	16Ω	≥ 105dB	250-6000	Φ110×100	Φ140×60×20mm



GT2-1110 (TH-5)



GT2-1111 (TH-6)



GT2-1112 (TH-12T)



GT2-1113 (TH-16S)



GT2-1114 (TH-20T)



GT2-1115 (TH-158)



GT2-1116

Model No.	Dimensions (mm)	Applicable Driver Unit	Driver coupong
GT2-1110	Φ125×110	DU-15~35	1- $\frac{3}{8}$ " 18Threads
GT2-1111	Φ155×110	DU-15~35	
GT2-1112	Φ305×240	DU-15~60	
GT2-1113	Φ405×320(280)	DU-15~80	
GT2-1114	Φ510×375(325)	DU-25~120	
GT2-1115	Φ360×220×285	DU-15~100	

Model No.	Voile Coil (mm)	Impedance
DVC-5	Φ25	4Ω or 8Ω
DVC-10	Φ25	4Ω or 8Ω
DVC-15	Φ38	4Ω or 16Ω
DVC-25	Φ51	4Ω or 16Ω
DVC-35	Φ51	4Ω or 16Ω
DVC-50	Φ51	4Ω or 16Ω
DVC-75~100	Φ51	4Ω or 16Ω
DVC-100~120	Φ66	4Ω or 16Ω

HORN SPEAKER/WARNING LIGHT SIREN



GT2-1117
(YH15-2)



GT2-1118
(YH25-3)



GT2-1119
(YH25-4)



GT2-1120
(YH35-1)



GT2-1121
(YH35-100V)



GT2-1122
(YH-406)



GT2-1123
(YH-85)



GT2-1124
(YH35-2)

Model No.	Input Power	Impedance	S.P.L. (1w/1m)	Frequency (Hz)	Magnetic (mm)	Dimensions (mm)	Material
GT2-1117	15W	8Ω	≥101dB	250-4000	Φ80×40×12mm	Φ250×275	AL.
GT2-1118	25W	8Ω	≥103dB	250-4500	Φ80×40×15mm	Φ305×310	AL.
GT2-1119	25W	8Ω	≥101dB	300-4000	Φ60×32×15mm	265×220×235	AL.
GT2-1120	35W	16Ω	≥105dB	200-4500	Φ80×40×15mm	Φ400×380	AL.
GT2-1121	35W	16Ω	≥108dB	200-5500	Φ100×60×15mm	Φ505×410	AL.
GT2-1122	30W	8Ω	≥102dB	200-5000	Φ80×40×15mm	205×125×240	A.B.S.
GT2-1123	15W	8Ω	≥96dB	300-4500	Φ70×32×12mm	152×101×200	A.B.S.
GT2-1124	35W	IN:120 v	≥105dB	200-5500	Φ100×60×17mm	Φ400×420	AL.



GT2-1125
(YHD20-2)



GT2-1126
(YHD20-3)



GT2-1127
(YHD10-2)



GT2-1128
(YHD80-1)



GT2-1129
(YHD10-1)

Model No.	Input Power	Impedance	S.P.L. (1w/1m)	Frequency (Hz)	Magnetic (mm)	Dimensions (mm)	Material
GT2-1125	20W	4Ω or 8Ω	108dB	500-5000	Φ60×32×12mm	Φ120×125	AL.
GT2-1126	20W	4Ω or 8Ω	108dB	500-5000	Φ60×32×12mm	Φ135×150	AL.
GT2-1127	10W	4Ω or 8Ω	108dB	500-5000	Φ60×32×10mm	Φ135×125	A.B.S.
GT2-1128	80W	8Ω or 16Ω	110dB	300-5500	Φ120×60×20mm	Φ210×170×135	AL.A.B.S.
GT2-1129	10W	4Ω or 8Ω	108dB	500-5000	Φ60×32×10mm	Φ135×125	A.B.S.



GT2-1130 (JDP-IV)
*Power:40W/80W/100W
*12VDC
*Length:1100~1280mm
*Color:Red,Blue,Yellow



GT2-1131 (XH-80)
*6-12VDC 250mA 90Flashes/min
*Color:Red,Blue,Yellow



GT2-1132 (XH-150)
*6-12VDC or 220V 400mA
10W 90Flashes/min
*Color:Red,Blue,Yellow



GT2-1133 (JD-12)
*6-12VDC or 220V
n:120r/min
*Color:Red,Blue,Yellow



GT2-1134 (XH-90)
*6-12VDC 250mA
90Flashes/min
*Color:Red,Blue,Yellow



GT2-1135 (M-M)
*6-12VDC 250mAx2
90Flashes/minx2
*Color:Red,Blue



GT2-1136 (M-1W)
*6-12VDC
n:120r/min
*Color:Red,Blue,Yellow

CAR SPEAKER & BOOM BOX



GT2-1201

(TS-A6991)
6 × 9" 5 way car speaker



GT2-1202

(TS-A6991R)
6 × 9" 5 way car speaker



GT2-1203

(TS-A6995)
6 × 9" 5 way car speaker



GT2-1204

(TS-A6980)
6 × 9" 4 way car speaker



GT2-1211

(XHF50P38)



GT2-1212

(XHF60P38)



GT2-1213

(XHF69P38A)



GT2-1214

(XHF69P45)

Model No.	Frequency	Sensitivity	Max Power	Magnet	Voice Coil	Woofer	Midrange and Tweeter
GT2-1211	80~20kHz	87dB/W/M	50W	8 Oz	25mm	Injection Cone	30mm Dome Tweeter
GT2-1112	65~20kHz	87dB/W/M	60W	8 Oz	25mm	Injection Cone	30mm Dome Tweeter
GT2-1113	50~20kHz	88dB/W/M	160W	20 Oz	25mm	Injection Cone	50mm Cone Midrange and 30mm Dome Tweeter 15mm Piezo Super Tweeter
GT2-1114	50~20kHz	91dB/W/M	180W	24 Oz	25mm	Inpp Cone	65mm Cone Midrange and 2-15mm Piezo Tweeter



GT2-1205(CP6903)

Power: 160W
Impedance: 4Ω
Fo: 50±20%Hz
Frequency Response: fo-21000Hz
Sensitivity: 91±3dB
Magnet: 20 oz



GT2-1206(CP6904)

Power: 150W
Impedance: 4Ω
Fo: 50±20%Hz
Frequency Response: fo-20000Hz
Sensitivity: 90±3dB
Magnet: 20 oz



GT2-1221(BBA1)

- * 4" Molded Plastic, Weather Resistant Enclosure
- * 4" Woofer And 2" Tweeter Resistant Enclosure
- * 8 Ohm Impedance
- * 15 Watts RMS, 30 Watts Max. Power
- * Frequency Response: 80-20000Hz
- * Sensitivity: 88dB/W/M
- * Dimensions: 140 × 120 × 210mm



GT2-1222A (BB652C)

- * 6.5" 3-Ways Speaker Box
- * 3" Midrange And Piezo Tweeter
- * Durable Blue Carpeting
- * 200 Watts Max. Power
- * 10 Oz Magnet (woofer)
- * 4 Ohm Impedance Stereo
- * 710 × 170 × 230mm (W × D × H)

GT2-1222B (BB802C)

- * 8" 3-Ways Speaker Box
- * 3" Midrange And 3" Piezo Tweeter
- * Durable Blue Carpeting
- * 300 Watts Max. Power
- * 20 Oz Magnet (woofer)
- * 4 Ohm Impedance Stereo
- * 760 × 170 × 230mm (W × D × H)

GT2-1222C (BB1002C)

- * 10" 3-Ways Speaker Box
- * 3" Midrange And Piezo Tweeter
- * Durable Blue Carpeting
- * 400 Watts Max. Power
- * 24 Oz Magnet (woofer)
- * 4 Ohm Impedance Stereo
- * 825 × 230 × 280mm (W × D × H)

GT2-1222D (BB1202C)

- * 12" 3-Ways Speaker Box
- * 3" Midrange And 3" Piezo Tweeter
- * Durable Blue Carpeting
- * 600 Watts Max. Power
- * 30 Oz Magnet (woofer)
- * 4 Ohm Impedance Stereo
- * 950 × 280 × 320mm (W × D × H)