

MOS FIELD EFFECT POWER TRANSISTORS

2SK739, 2SK739-Z

FAST SWITCHING N-CHANNEL SILICON POWER MOS FET INDUSTRIAL USE

FEATURES

- Suitable for switching power supplies, actuator controls, and pulse circuits.
- Low $R_{DS(on)}$
- No second breakdown
- 4 V Gate Drive – Logic level –
- Designed for Hybrid Integrated Circuits

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

Drain to Source Voltage	V_{DS}	60	V
Gate to Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	$I_{D(DC)}$	± 2.0	A
Peak Drain Current	$I_{D(pulse)}^*$	± 8.0	A
Total Power Dissipation	P_T^{**}	20	W
Total Power Dissipation at 25°C Ambient Temperature	P_T^{***}	2.0	W
Channel Temperature	T_{ch}	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to $+150$	$^\circ\text{C}$

* $PW \leq 300 \mu\text{s}$, Duty Cycle $\leq 10\%$







** $T_c = 25^\circ\text{C}$

*** Mounted on ceramic substrate of $2.5 \text{ cm}^2 \times 0.7 \text{ mm}$


ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	MIN.	TYP	MAX.	UNIT	TEST CONDITIONS
Drain Leakage Current	I_{DSS}			10	μA	$V_{DS} = 60 \text{ V}$, $V_{GS} = 0$
Gate to Source Leakage Current	I_{GSS}			± 100	nA	$V_{GS} = \pm 20 \text{ V}$, $V_{DS} = 0$
Gate to Source Cutoff Voltage	$V_{GS(off)}$	1.0		2.5	V	$V_{DS} = 10 \text{ V}$, $I_D = 1 \text{ mA}$
Forward Transfer Admittance	$ Y_{fs} $	1.0			S	$V_{DS} = 10 \text{ V}$, $I_D = 1 \text{ A}$
Drain to Source On-State Resistance	$R_{DS(on)}$		0.17	0.25	Ω	$V_{GS} = 10 \text{ V}$, $I_D = 1 \text{ A}$
Drain to Source On-State Resistance	$R_{DS(on)}$		0.22	0.35	Ω	$V_{GS} = 4 \text{ V}$, $I_D = 0.8 \text{ A}$
Input Capacitance	C_{iss}		550		pF	$V_{DS} = 10 \text{ V}$, $V_{GS} = 0$
Output Capacitance	C_{oss}		200		pF	$f = 1 \text{ MHz}$
Reverse Transfer Capacitance	C_{rss}		60		pF	
Turn-On Delay Time	$t_d(on)$		10		ns	$I_D = 1 \text{ A}$, $V_{CC} = 30 \text{ V}$
Rise Time	t_r		20		ns	$V_{GS(on)} = 10 \text{ V}$
Turn-Off Delay Time	$t_d(off)$		80		ns	$R_L = 30 \Omega$
Fall Time	t_f		20		ns	$R_{in} = 10 \Omega$


NEC cannot assume any responsibility for any circuits shown or represent that they are free from patent infringement.

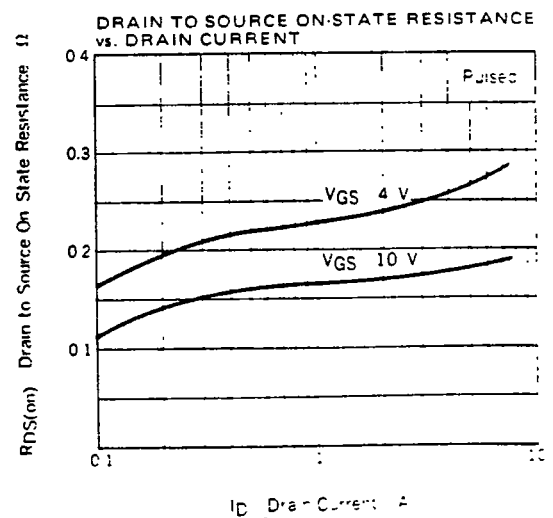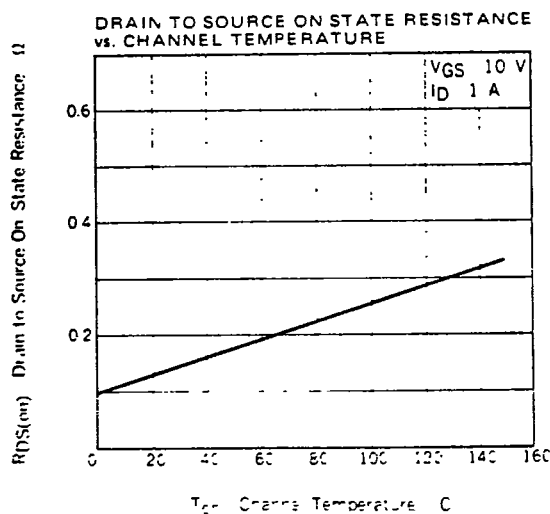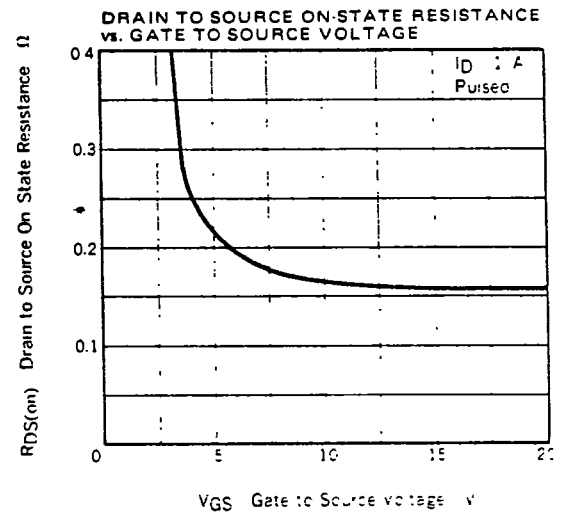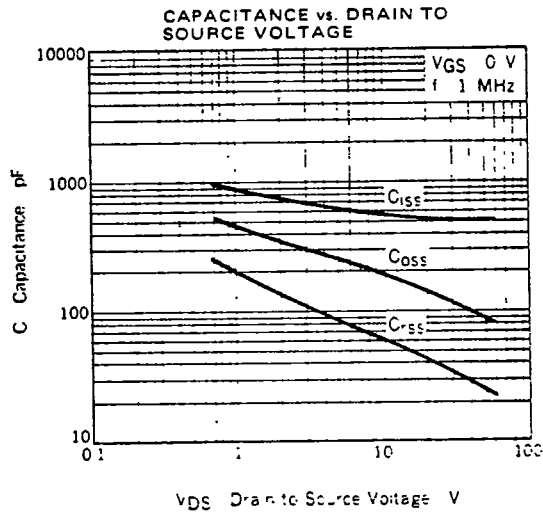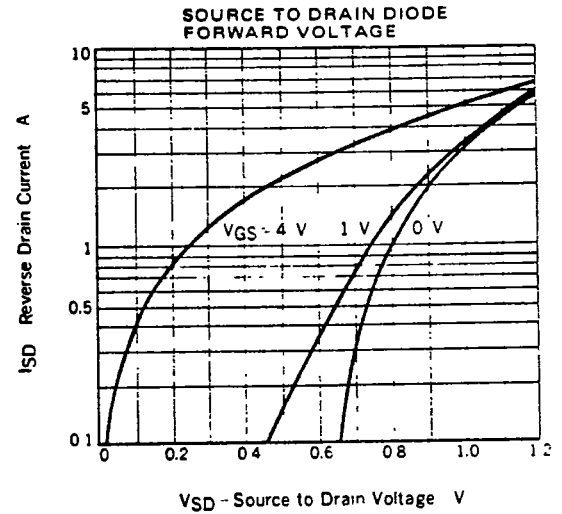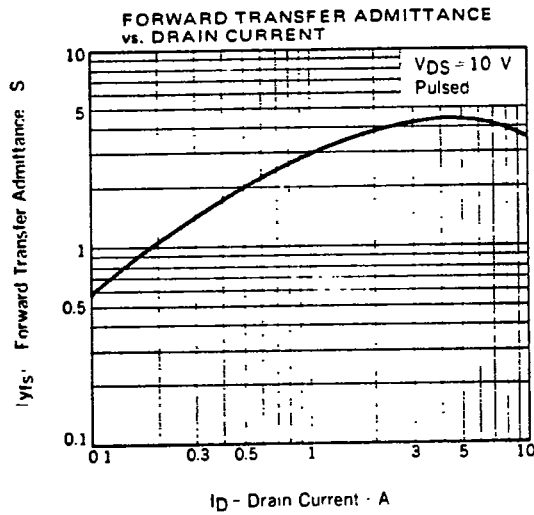


TYPICAL TRANSFER CHARACTERISTICS

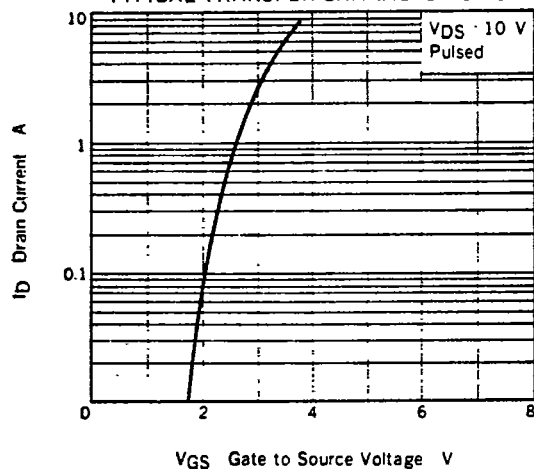

GATE TO SOURCE CUTOFF VOLTAGE vs. CHANNEL TEMPERATURE

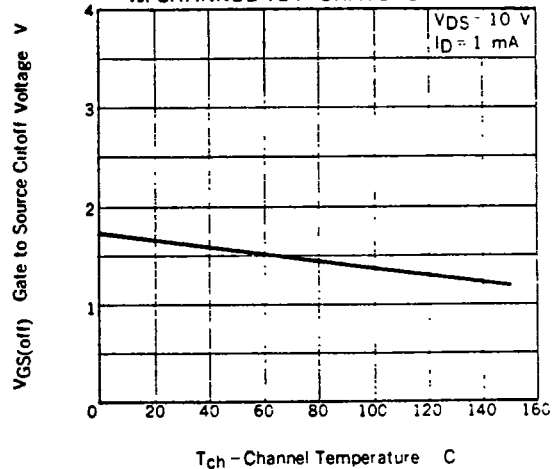

SWITCHING CHARACTERISTICS

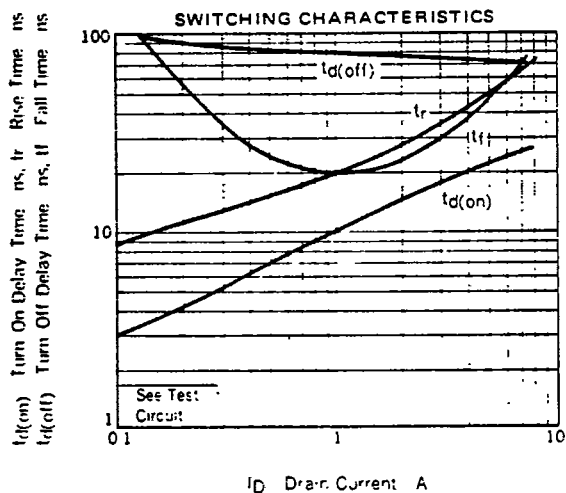

SWITCHING TIME TEST CIRCUIT

