



KVAZER Ltd




E-mail: quazerel@evrocom.net
Web site: www.quazerel.com

12, KUKLENSKO SHOSHE Str.
PLOVDIV 4000, BULGARIA
tel: /+359 32/ 675 136, 675 134
fax: /+ 359 32/ 670 443

Product Specification



15EDGK-3.5
15EDGK-3.81

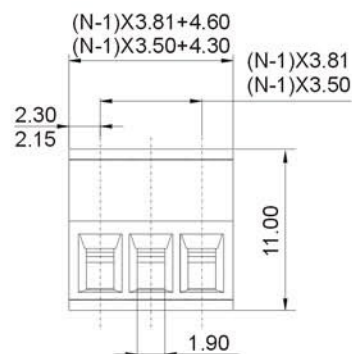

A 向视图

Material

Screws	:	M2 steel Zinc plated
Contact	:	Phosphor bronze
Housing	:	PA66, UL94V-0

Electrical

Rated voltage	:	300V
Rated current	:	8A
Contact resistance	:	20m Ω
Insulation resistance	:	5000M Ω /DC1000V
Withstanding voltage	:	AC2000V/1Min
Wire range	:	28-16AWG 1.5mm ²

Mechanical

Temp. Range	:	-40°C~+105°C
Torque	:	0.2Nm (1.7lb.in)
Strip length	:	6-7mm

HOW TO ORDER:

□ - □ □ P - 1 □ -

X	X	X
Customer Request		

Series No. No of Pole

Color

1 Gray	4 Green	7 Trans-parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White



DEGSON ELECTRONICS CO., LTD.

NAME

15EDGK-3.5
15EDGK-3.81