



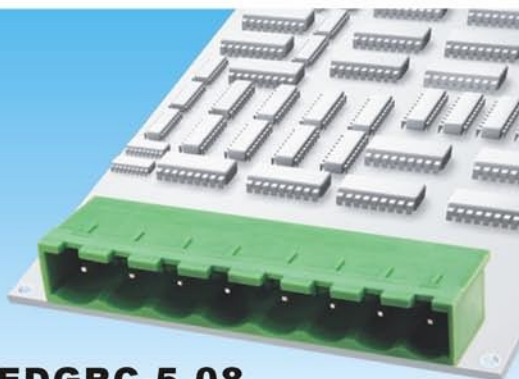

2EDGRC-5.0 2EDGRC-5.08
2EDGRC-7.5 2EDGRC-7.62

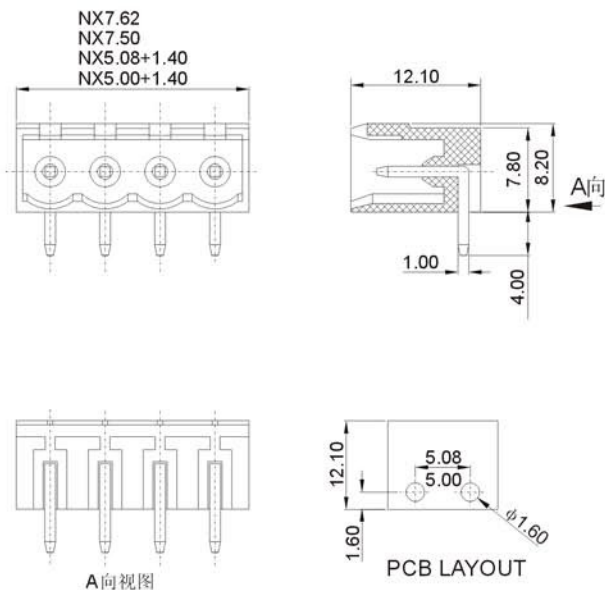

Material

Pin header:	Brass, Tin plated
Housing :	PA66, UL94V-0

Electrical

Rated voltage :	300V
Rated current :	15A
Contact resistance :	20m Ω
Insulation resistance :	5000M Ω /DC1000V
Withstanding voltage:	AC2000V/1Min

Mechanical

Temp.Range :	-40°C~+105°C
--------------	--------------

HOW TO ORDER:

- P - -

X	X	X
---	---	---

Customer Request

Series No.
No of Pole
Color

1 Gray	4 Green	7 Trans- parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White



DEGSON ELECTRONICS CO., LTD.

NAME **2EDGRC-5.0 2EDGRC-5.08**
2EDGRC-7.5 2EDGRC-7.62