



КВАЗЕР ЕООД

София 02/98 35 700
Плевен 064/801 979




Плюс 032/626 664
Плюс 032/675 134

E-mail: sales@kvazer.com

Web site: kvazer.com



2EDGK-5.0
2EDGK-5.08

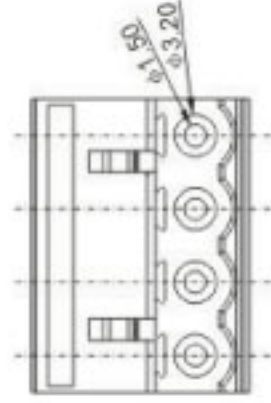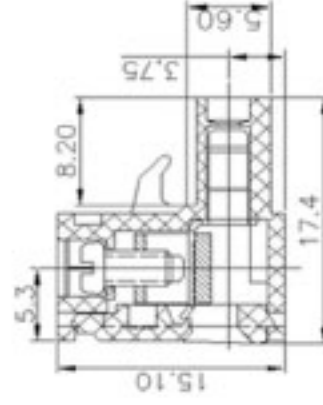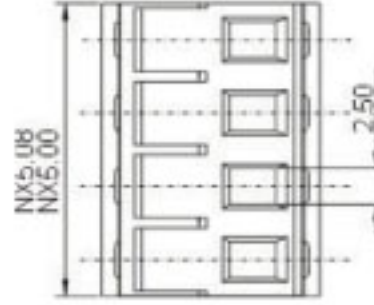

APPROVAL		
Electrical		
Standard	UL	IEC
Rated voltage	300V	320V
Rated current	15A	20A
Wire range	28-12AWG	2.5mm ²
Withstanding voltage		AC2500V/1Min
Mechanical		
Torque		0.4Nm(3.5Lb-In)
Ambient temperature		-40°C~+105°C
Strip length		7mm
Dimensions		
Pitch		5.0mm(.197") 5.08mm(.200")
Poles		2P-24P
Material		
Housing		PA66,UL94 V-0
Screws		M2.5,Steel, Cr ³⁺ Zn-plated
Contact		Phosphor bronze
Cage		Brass, Ni-plated

HOW TO ORDER :

		P	-	1	-
X	X	X	X	X	X
Customer Request					

Series number

No. of pole

Color

1	Single pitch	1	Grey
2	Double pitch	2	Blue
		3	Black

		DEGSON ELECTRONICS CO., LTD.
	NAME	2EDGK-5.0 2EDGK-5.0R