


S4VB20

200V 4A

OUTLINE DIMENSIONS

Case : S4VB

Unit : mm

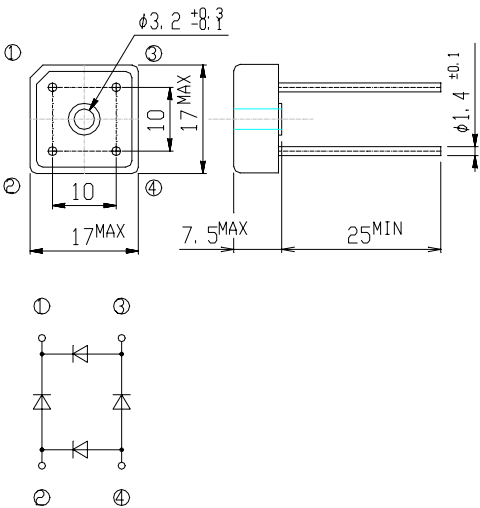

RATINGS

● Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-40~150	°C
Operating Junction Temperature	Tj		150	°C
Maximum Reverse Voltage	V _{RM}		200	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, Ta=40°C With heatsink $\theta_{fa}=10^{\circ}\text{C/W}$	4	A
		50Hz sine wave, R-load, Ta=40°C Without heatsink	2.6	
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1cycle peak value, Tj=25°C	80	A
Current Squared Time	I ² t	1ms ≤ t < 10ms Tc=25°C	32	A ² s
Mounting Torque	TOR	(Recommended torque : 0.5N·m)	0.8	N·m

● Electrical Characteristics (Tl=25°C)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =2A, Pulse measurement, Rating of per diode	Max.1.05	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement, Rating of per diode	Max.10	μA
Thermal Resistance	θ _{jl}	junction to lead	Max.4.5	°C/W


S4VBx

Forward Voltage

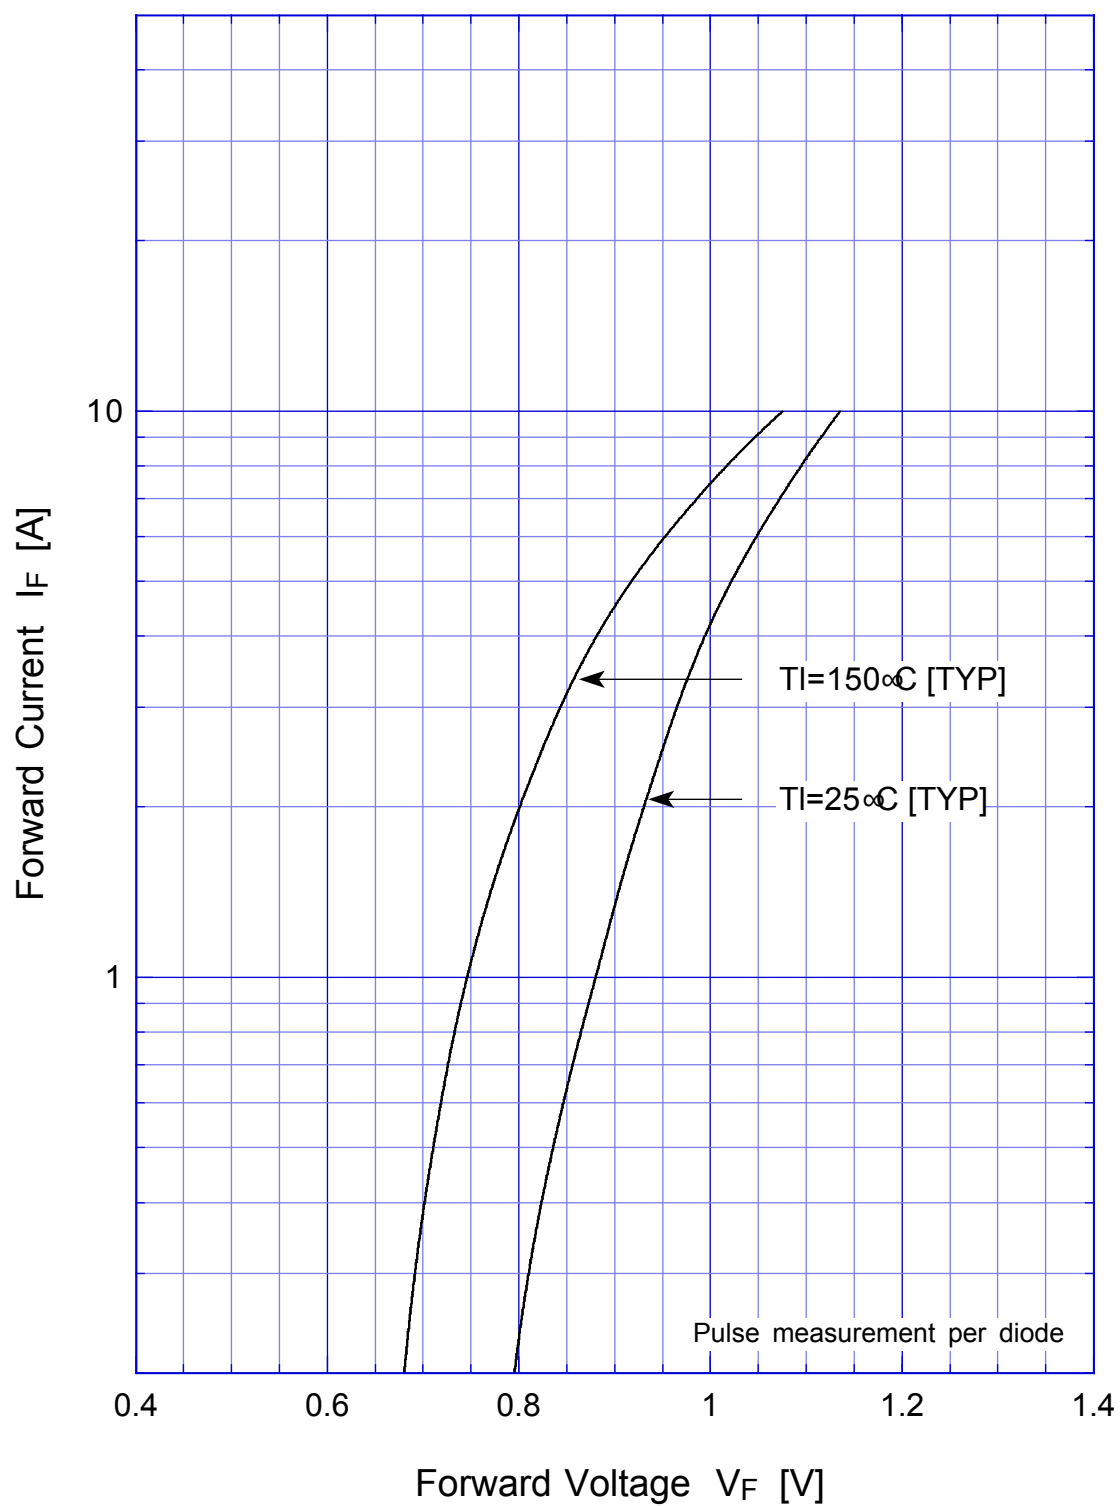

S4VBx

Forward Power Dissipation

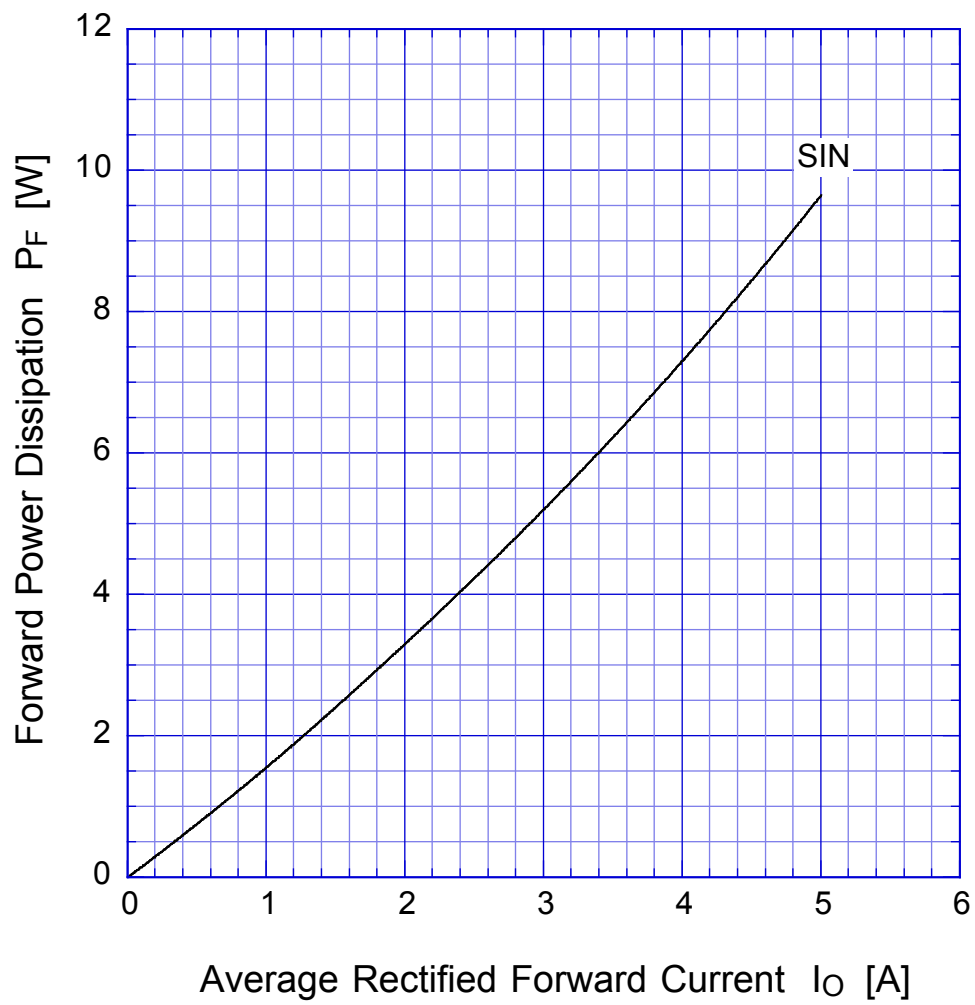


$T_j = 150^\circ\text{C}$

Sine wave

S4VBx

Derating Curve

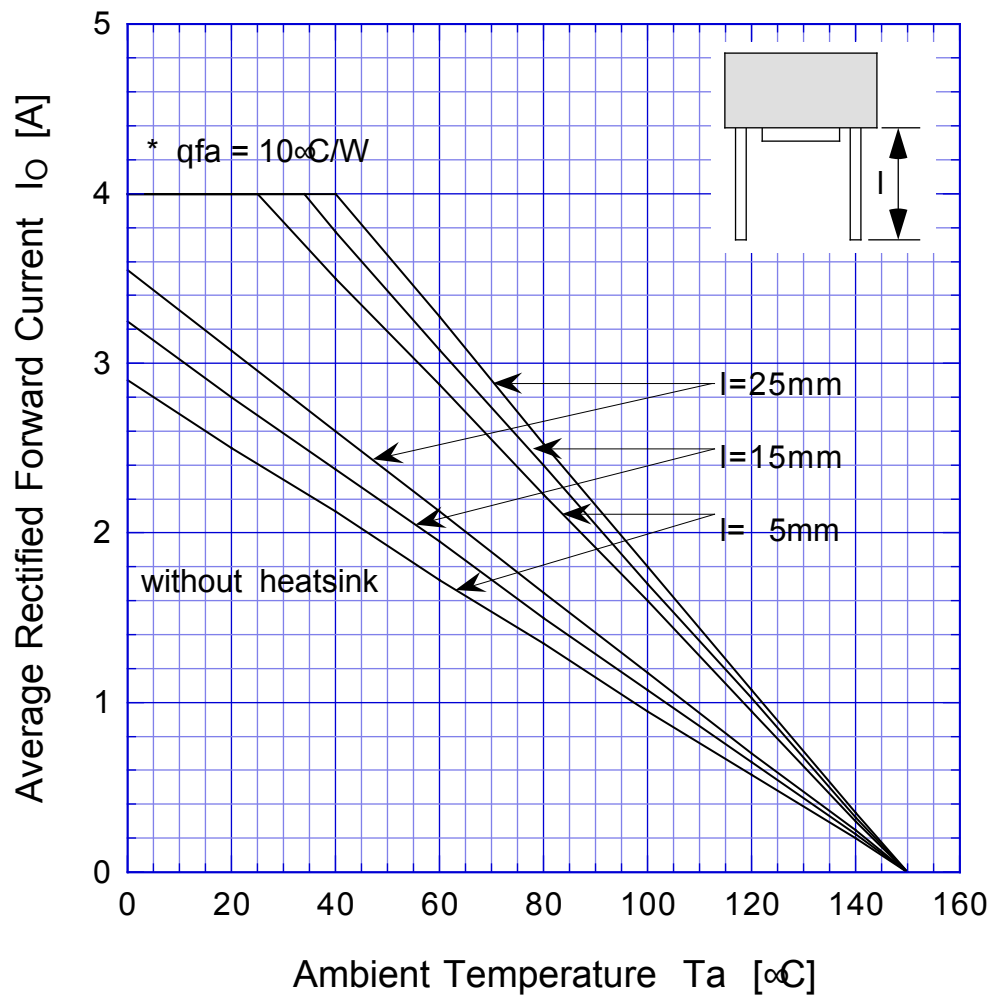

Sine wave

R-load

Free in air

* with thermal compound, TOR=3kg-cm

S4VBx

Peak Surge Forward Capability

