

PC123/PC123F

European Safety Standard Approved Type Long Creepage Distance Photocoupler

✿ DIN-VDE0884 approved type (**PC123Y/PC123FY**) is also available as an option.

■ Features

1. Conform to European Safety Standard
2. Internal isolation distance : 0.4mm or more
3. High collector-emitter voltage (V_{CEO} : 70V)
4. Long creepage distance type
5. Recognized by UL (No. E64380)

Approved by VDE (DIN-VDE83601)

Approved by BSI

(BS415 No. 7087, BS7002 No. 7409)

Approved by SEMCO (No. 9216212)

Approved by DEMCO (No. 108954)

Approved by NEMKO (No. 199438181)

Approved by EI (No. 155030)

Recognized by CSA (No. CA95323)

	Creepage distance	Space distance
PC123	6.4mm or more	6.4mm or more
PC123F	8mm or more	8mm or more

■ Applications

1. Power supplies
2. OA equipment

■ Absolute Maximum Ratings (Ta= 25°C)

	Parameter	Symbol	Ratings	Unit
Input	Forward current	I_F	50	mA
	*1 Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V_{CEO}	70	V
	Emitter-collector voltage	V_{ECO}	6	V
	Collector current	I_C	50	mA
	Collector power dissipation	P_C	150	mW
	Total power dissipation	P_{tot}	200	mW
	*2 Isolation voltage	V_{iso}	5	kV _{rms}
	Operating temperature	T_{opr}	- 30 to + 100	°C
	Storage temperature	T_{stg}	- 55 to + 125	°C
	*3 Soldering temperature	T_{sol}	260	°C

*1 Pulse width $\leq 100 \mu s$, Duty ratio : 0.001


*2 AC for 1 minute, 40 to 60% RH

*3 For 10 seconds


■ Outline Dimensions

(Unit : mm)

PC123

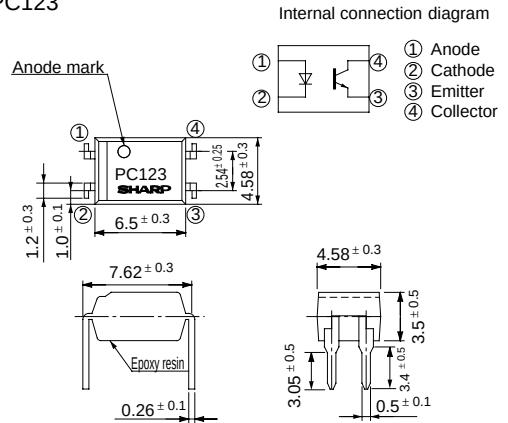

PC123F

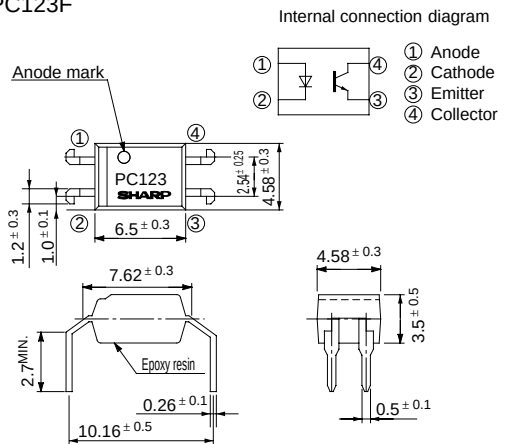

■ Electro-optical Characteristics

(T_a= 25°C)

Parameter			Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage		V _F	I _F = 20mA	-	1.2	1.4	V
	Reverse current		I _R	V _R = 4V	-	-	10	μ A
	Terminal capacitance		C _t	V = 0, f= 1kHz	-	30	250	pF
Output	Collector dark current		I _{CEO}	V _{CE} = 50V, I _F = 0	-	-	100	nA
	Collector-emitter breakdown voltage		BV _{CEO}	I _C = 0.1mA, I _F = 0	70	-	-	V
	Emitter-collector breakdown voltage		BV _{ECO}	I _E = 10 μA, I _F = 0	6	-	-	V
Transfer characte- risitics	Collector current		I _C	I _F = 5mA, V _{CE} = 5V	2.5	-	20	mA
	Collector-emitter saturation voltage		V _{CE(sat)}	I _F = 20mA, I _C = 1mA	-	0.1	0.2	V
	Isolation resistance		R _{ISO}	DC500V, 40 to 60%RH	5 x 10 ¹⁰	10 ¹¹	-	Ω
	Floating capacitance		C _f	V = 0, f= 1MHz	-	0.6	1.0	pF
	Cut-off frequency		f _c	V _{CE} = 5V, I _C = 2mA R _L = 100Ω, - 3dB	-	80	-	kHz
	Response time	Rise time	t _r	V _{CE} = 2V, I _C = 2mA	-	4	18	μ s
		Fall time	t _f	R _L = 100Ω	-	3	18	μ s

Fig. 1 Forward Current vs. Ambient Temperature

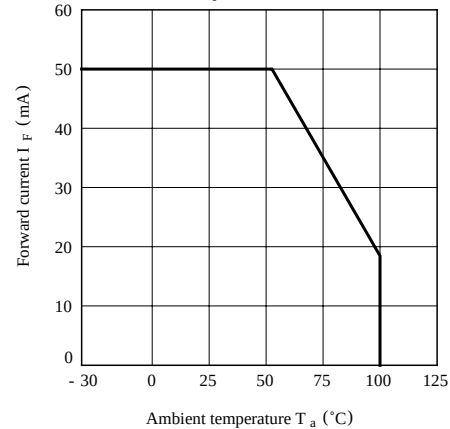


Fig. 2 Diode Power Dissipation vs. Ambient Temperature

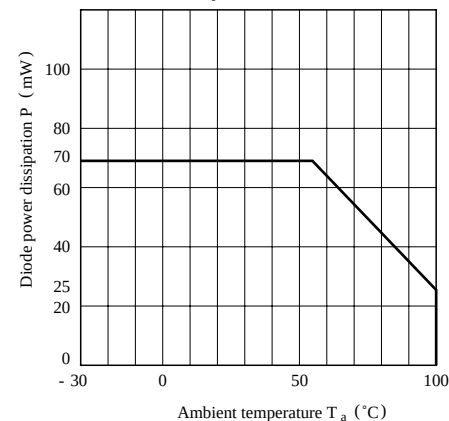


Fig. 3 Collector Power Dissipation vs. Ambient Temperature

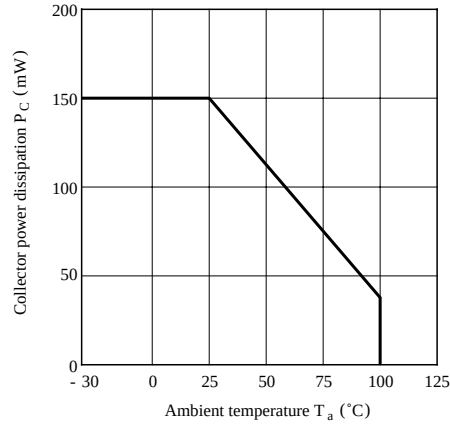


Fig. 4 Power Dissipation vs. Ambient Temperature

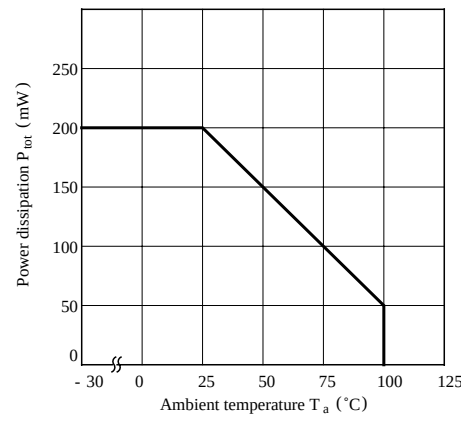


Fig. 5 Peak Forward Current vs. Duty Ratio

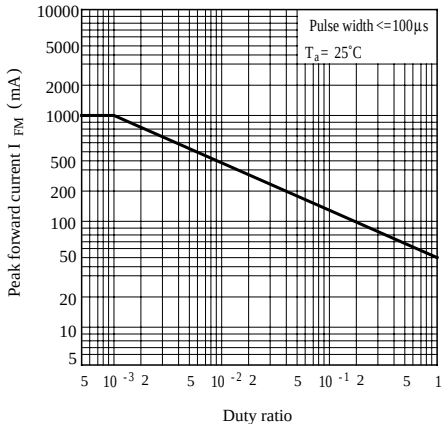


Fig. 6 Forward Current vs. Forward Voltage

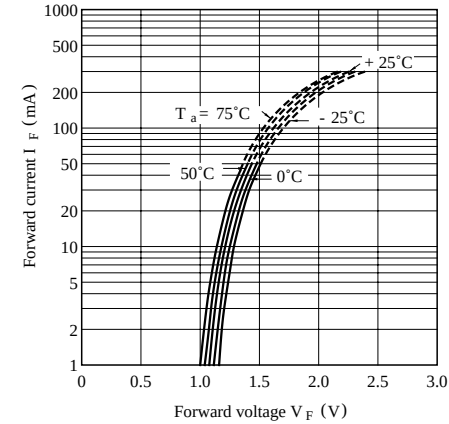


Fig. 7 Current Transfer Ratio vs. Forward Current

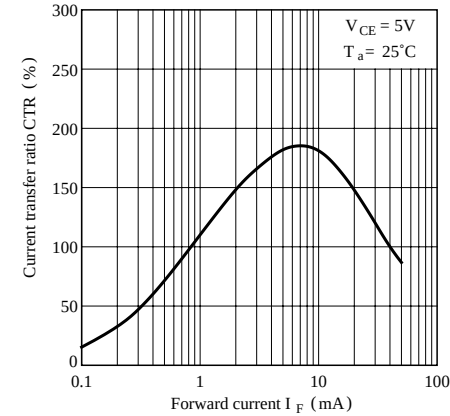


Fig. 8 Collector Current vs. Collector-emitter Voltage

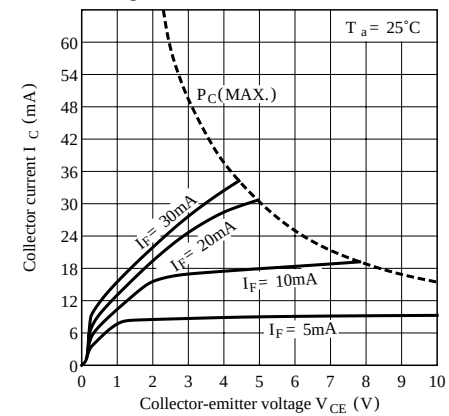


Fig. 9 Relative Current Transfer Ratio vs. Ambient Temperature

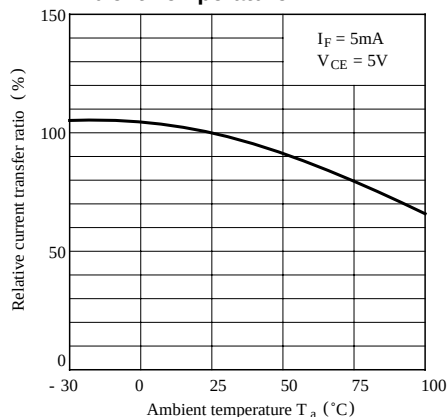


Fig.10 Collector-emitter Saturation Voltage vs. Ambient temperature

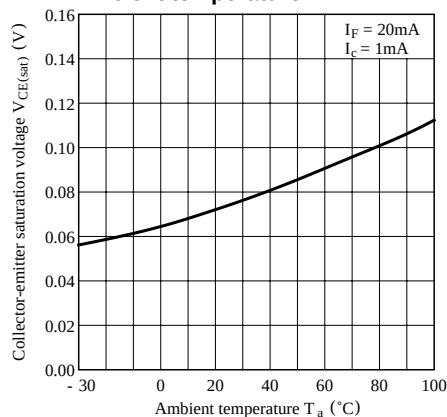


Fig.11 Collector Dark Current vs. Ambient Temperature

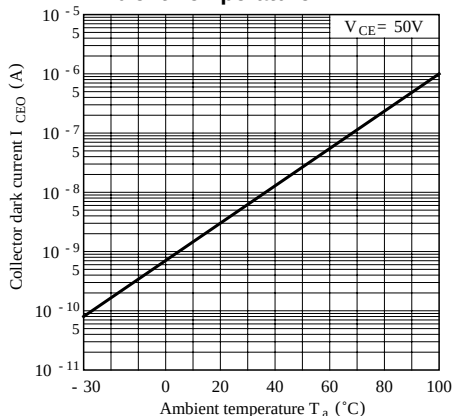


Fig.12 Response Time vs. Load Resistance

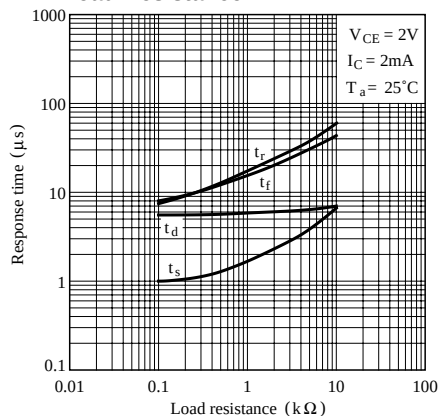


Fig.13 Frequency Response

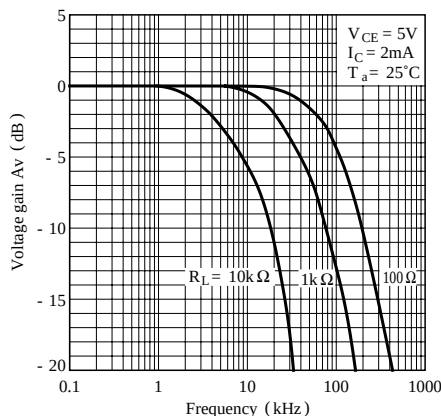


Fig.14 Collector-emitter Saturation Voltage vs. Forward Current

