
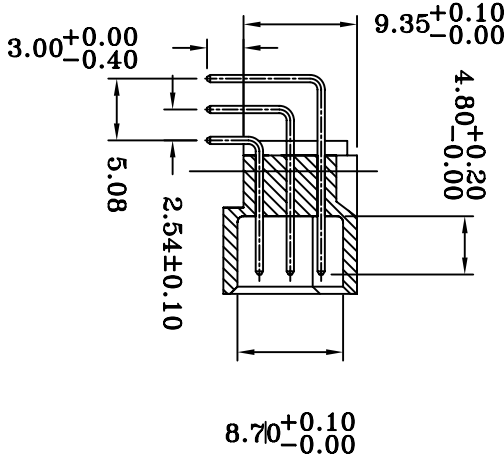



This document is the property of Amphenol Corporation and is delivered on a non-exclusive basis. It is to be used for manufacturing or sale by anyone other than Amphenol Corporation. No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without prior written permission from Amphenol Corporation. All rights reserved.

CUSTOMER DRAWING

REV. NO.		DESCRIPTION	DATE	APPROVED
1				

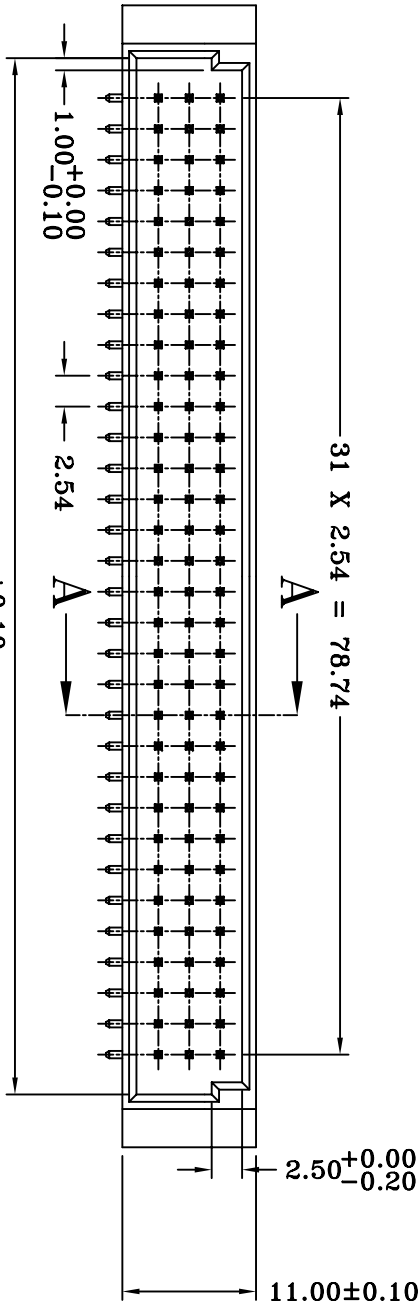

SECTION VIEW A-A

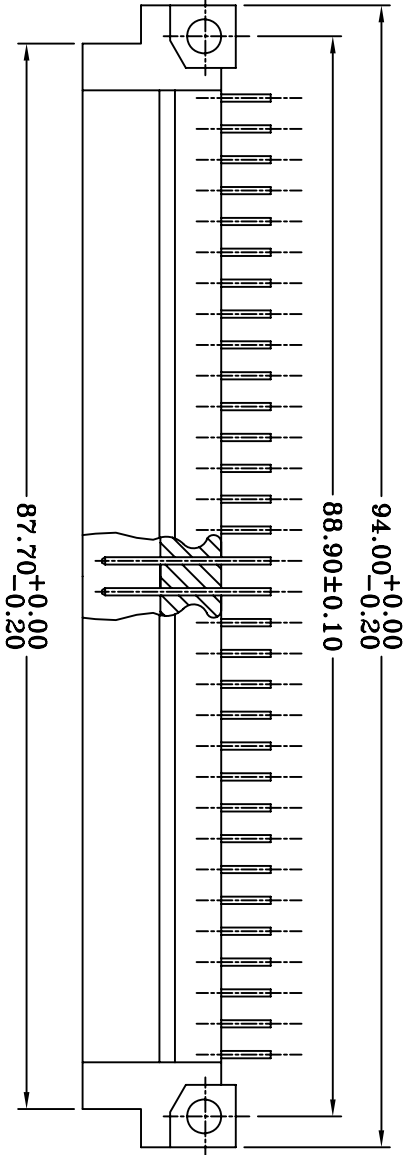

PART NUMBER	PERFORMANCE LEVEL
C133 714A 96P	2B
C133 714A 96P1	2

NOTES:

1. SOLDER PINS MOUNTABLE IN HOLE PATTERN ACCORDING TO DIN 41612 TEIL 2.
2. CONTACT RETENTION FORCE 12N MIN.
3. INSULATOR MATERIAL - PBT GREY UL94-V0
4. CONTACT MATERIAL - CUZn30 COPPER ALLOY

UNLESS OTHERWISE SPECIFIED		APPROVAL	DATE	Amphenol			
TOLERANCES	METRIC	DRAWN BY	1/10/20	Amphenol East Asia Limited			
XX +/-	.5	CHECKED BY	1/10/20				
XX +/-	.10	FILE					
XX +/-	1.0	TITLE 96 WAYS DIN MALE					
ANGLES +/-	1.0°	R/A, C TYPE					
SEE MATERIALS AND FINISHES							
REMOVE SHARP EDGES							
DIMENSIONS		ANGLE OF PROJECTION		SIZE DRAWING NO.			
US	INCHES			B	CC133 714A 96P(1)		
METRIC	MM			SCALE	NONE		
				SHEET 1	OF 1		
				REV.	A		