


Insulated cable lugs 10-150 mm²



Ringtype, with flared insulation sleeve
Material: Cu-ETP, tinned and soldered
Insulation sleeve: PA, free of halogen

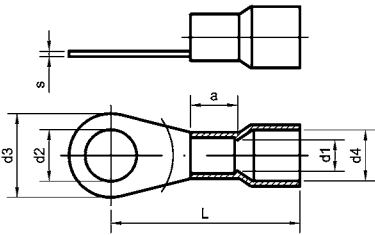

Part-No.	cross-section mm²	drilling M	dimensions mm							weight kg/‰ pcs.	crimping-tools/page no.			
			d ₁	d ₂	d ₃	d ₄	L	a	s					
01461.01.02	10	5	4,5	5,3	10	8	24,5	8	1,1	2,30	12602 page no. 152	12655 page no. 163	30460 page no. 165;12930/33 page no.169	31460 page no. 167
01462.01.02		6		6,5	11		25,5			2,45				
01463.01.02		8		8,4	14		28,5			2,95				
01464.01.02		10		10,5	18		29,5			3,50				
01466.01.02	16	5	5,8	5,3	11	10,5	31,5	10	1,2	4,00				
01467.01.02		6		6,5	11		31,5			3,80				
01468.01.02		8		8,4	14		33,5			4,25				
01469.01.02		10		10,5	18		35,5			5,00				
01471.01.02	25	5	7,5	5,3	12	13	38	11	1,5	7,00				
01472.01.02		6		6,5	12		38			7,00				
01473.01.02		8		8,4	16		38			7,60				
01474.01.02		10		10,5	18		39			7,80				
01475.01.02	35	12		13	22		44			9,70				
01476.01.02		6	9	6,5	15	14,5	41	12	1,6	9,70				
01477.01.02		8		8,4	16		41			9,70				
01478.01.02		10		10,5	18		42			10,00				
01479.01.02	50	12		13	22		46			11,70				
01494.01.02		6	11	6,5	18	16,5	47,5	16	1,8	17,55				
01480.01.02		8		8,4	18		47,5			17,10				
01481.01.02		10		10,5	18		47,5			16,50				
01482.01.02	70	12		13	22		49,5			18,00				
01483.01.02		6	13	6,5	22	18,7	51	18	2	26,30				
01484.01.02		8		8,4	22		51			26,30				
01485.01.02		10		10,5	22		51			25,50				
01486.01.02	95	12		13	22		51			24,70				
01487.01.02		16		17	28		55			27,70				
01495.01.02		8	15	8,4	24	21,7	57,5	20	2,5	41,10				
01488.01.02		10		10,5	24		57,5			41,70				
01489.01.02	120	12		13	24		57,5			39,40				
01490.01.02		16		17	28		59,5			39,40				
01496.01.02		8	16,5	8,4	24	24,2	62	22	3	57,70				
01491.01.02		10		10,5	24		62			56,70				
01492.01.02	150	12		13	24		62			53,30				
01493.01.02		16		17	28		66			64,10				
01497.01.02		10	19	10,5	30	27,2	70	24	3,2	82,90				
01498.01.02		12		13	30		70			78,30				
01499.01.02		16		17	30		70			80,10				

Insulated closed end terminals 1,5-6 mm²

Material: Cu-ETP, tinned
Insulation sleeve: PA, free of halogen



Best-Nr.	cross-section mm²	type	dimensions mm				weight kg/‰ pcs.	crimping-tools/page no.
			d ₁	d ₄	L ₁	L ₂		
01088.01	1,5-2,5	I	2,3	7,5	21	7	0,60	12600/N, 12601, 05180 page no. 152
01090.01	1,5-2,5		2,3	5,2	16		0,50	12858/05160/61/62 page no. 153
01091.01	4-6		3,6	7,5	18		1,42	12430, 12408, 12425 page no. 156/57
01089.01	4-6	II	3,6	7,5	18	7	0,90	