




## Sta-Kon®

### RAB

Fully insulated bullet female disconnect terminal for easy connection and release. UL 94 V-2 rated Polycarbonate insulation, with excellent deformation characteristics and resistance to high temperature. Colour-coded according to the wire size. Easy entry funnel design, for fast and secure insertion of the conductor.

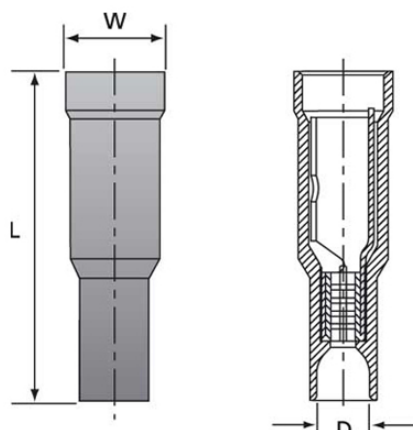

**T&B Catalog Number:**

**RAB**

**EAN Number:**

05414363115304

**UPC Number:**

78621058417

**Description:**

Fully insulated bullet female receptacle, wire range 0.5 - 1.5 mm<sup>2</sup>, phosphor bronze, red  
PC - Polycarbonate insulation

#### Technical Information

Type	disconnect
Style	Fully insulated bullet female receptacle
Material	phosphor bronze
Plating	tin plated
Metal Barrel	brazed seam to prevent barrel separation
Insulation	PC - Polycarbonate
Temperature Resistance	+115°C / +125°C
Cable Insertion	easy entry funnel design
Flammability Rating	UL 94 V-2
Colour	red

#### Ordering Information

Wire Range (mm <sup>2</sup> )	0.5 - 1.5
D (mm)	4
L (mm)	25
W (mm)	3.9
Quantity (pieces)	100
Weight (g/100)	115.0
Tooling	ERG2000KE, ERG2001A, WT2124Y