


Insulated terminals with soldered seam and easy-entry insulation 0.1 – 6 mm² DIN 46 237

material: Cu-ETP, insulation: PC (resp. *polyamide)

surface: tin plated. S = small palm

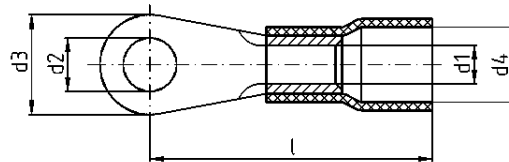

Querschnitt mm ²	flat hole diameter M	art.-no.	colour of insulation	d ₁	dimensions in mm				Cu-weight 100 pcs. approx. kg	packing unit pcs.	tool recommendation
0.1 – 0.5	2	42001*	yellow	1.0	2.3	2.2	5	14	0.02	100	WZ 5 page 113
	3	42003*				3.2	5	14	0.02	100	
	4	42005*				4.3	6.5	16	0.03	100	
	5	42006*				5.3	8	16	0.03	100	
0.5 – 1	2	42010	red	1.6	4.0	2.2	6	17	0.06	100	WZ 12 page 108, WZ 1 page 113
	2.5	42011				2.7	6	17	0.06	100	
	3	42012				3.2	6	17	0.06	100	
	3.5	42013				3.7	6	17	0.06	100	
	4 S	42014				4.3	7	17.5	0.06	100	
	4	42015				4.3	8	18	0.07	100	
	5 S	42016				5.3	8	18.5	0.06	100	
	5	42017				5.3	10	19	0.08	100	
	6	42018				6.5	10	19	0.07	100	
	8	42019				8.4	14	23	0.10	100	
	10	42009				10.5	18	25	0.09	100	
1.5 – 2.5	3	42020	blue	2.3	4.4	3.2	6	17	0.06	100	WZ 9 page 116, WZ 24 page 117, WZ 23 page 117
	3.5	42021				3.7	6	17	0.06	100	
	4 S	42022				4.3	6.8	17.6	0.06	100	
	4	42023				4.3	8	18	0.08	100	
	5 S	42024				5.3	8	19.5	0.07	100	
	5	42025				5.3	10	20	0.10	100	
	6	42026				6.5	11	22	0.11	100	
	8	42027				8.4	14	23	0.14	100	
	10	42028				10.5	18	25.6	0.19	100	
	12	42029				13	18	26	0.15	100	
4 – 6	4	42030	yellow	3.6	6.4	4.3	8	21	0.14	100	WZ 12 page 108, WZ 1 page 113
	5	42031				5.3	10	22	0.16	100	
	6	42032				6.5	11	23	0.17	100	
	8	42033				8.4	14	26	0.21	100	
	10	42034				10.5	18	28	0.27	100	
	12	42035				13	18	28	0.23	100	