



Sta-Kon®

TRA35

Insulated ring terminal (DIN 46237) for secure and reliable termination. UL 94 V-2 rated Nylon (Polyamide) insulation provides excellent chemical, impact and abrasion resistance. Ideal for harsh environments. Colour-coded according to the wire size.

T&B Catalog Number:

TRA35

EAN Number:


05414363001591

UPC Number:

78621054065

Description:

Ring terminal DIN 46237, M3.5 wire range 0.5 - 1.5 mm², copper, red PA - Polyamide insulation

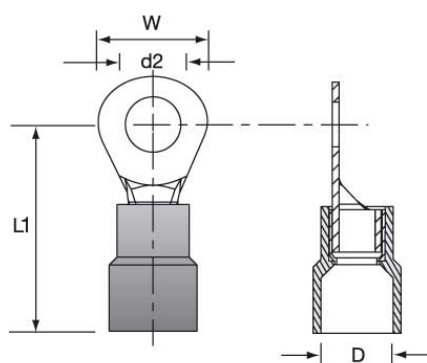

Technical Information

Type	ring
Style	Ring terminal DIN 46237
Material	copper
Plating	tin plated
Marking	wire size and bolt size stamped on the tongue
Metal Barrel	brazed seam to prevent barrel separation
Insulation	PA - Polyamide
Temperature Resistance	+85°C / +105°C
Flammability Rating	UL 94 V-2
Colour	red

Ordering Information

Wire Range (mm ²)	0.5 - 1.5
Stud Size	M3.5
D (mm)	4
L1 (mm)	20.4
W (mm)	6.6
Quantity (pieces)	100
Weight (g/100)	67.0
Tooling	ERG2000KE, ERG2001A, WT2124Y