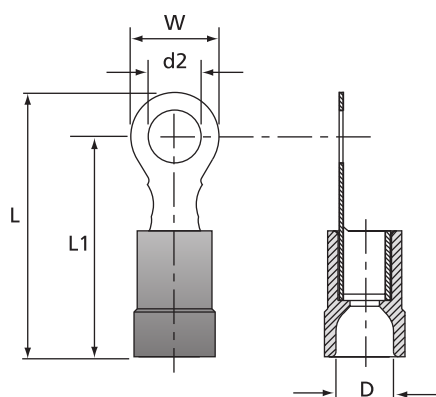


Polycarbonate insulated ring terminals

Insulated terminals**Technical Information**

Material	Electrolytic copper
Plating	Tin plated
Marking	Wire size and bolt size stamped on the tongue
Metal barrel	Brazed seam to prevent barrel separation
Insulation	PC = Polycarbonate High temperature applications, excellent deformation characteristics
Temperature resistance	+115°C / +125°C
Colour coding of the insulation	According to the wire size
Cable insertion	Easy entry
Flammability rating	UL 94 V-2

Product Ref.	Wire size range	Colour	Stud hole size d2	Dimensions				Weight [g/100]	Quantity [pieces]	Crimping tool*
	[mm²]			W [mm]	L [mm]	D [mm]	L1 [mm]			
RZ 3	0.25 - 0.75	Yellow	M 3	5.5	18.0	3.2	15.0	36	100	ERG2510
RZ 4	0.25 - 0.75	Yellow	M 4	7.5	21.0	3.2	17.5	45	100	
RZ 5	0.25 - 0.75	Yellow	M 5	9.0	22.0	3.2	17.5	51	100	
RA3RR	0.5 - 1.5		M 3	5.5	19.0	4.0	16.0	60	100	ERG2000KE ERG2001A WT2124Y
RA4RR	0.5 - 1.5		M 4	7.0	20.5	4.0	17.0	71	100	
RA5RR	0.5 - 1.5		M 5	9.0	22.5	4.0	18.0	79	100	
RA6RR	0.5 - 1.5		M 6	11.0	26.5	4.0	21.0	96	100	
RB 3	1.5 - 2.5		M 3	5.5	19.0	4.5	16.0	75	100	
RB 4-EU	1.5 - 2.5		M 4	7.0	20.5	4.5	17.0	92	100	
RB 5	1.5 - 2.5		M 5	9.0	22.5	4.5	18.0	96	100	
RB 6	1.5 - 2.5		M 6	11.0	26.5	4.5	21.0	117	100	
RB 8	1.5 - 2.5		M 8	14.0	27.5	4.5	21.0	141	100	
RC 4	4.0 - 6.0		M 4	8.0	24.0	6.4	20.5	158	50	
RC 5	4.0 - 6.0		M 5	9.0	25.0	6.4	20.5	166	50	
RC 6-EU	4.0 - 6.0		M 6	11.0	28.5	6.4	23.0	179	50	
RC 8	4.0 - 6.0		M 8	14.0	31.0	6.4	24.0	220	50	
RC 10 E	4.0 - 6.0		M 10	17.0	34.0	6.4	25.5	245	50	

* Use selection chart to determine die set (see page 376)

See pages 370 to 376 for tooling specifications