




# Sta-Kon®

## RABM

Insulated bullet male disconnect terminal for easy connection and release. UL 94 V-2 rated Polycarbonate insulation, with excellent deformation characteristics and resistance to high temperature. Colour-coded according to the wire size. Easy entry funnel design, for fast and secure insertion of the conductor.

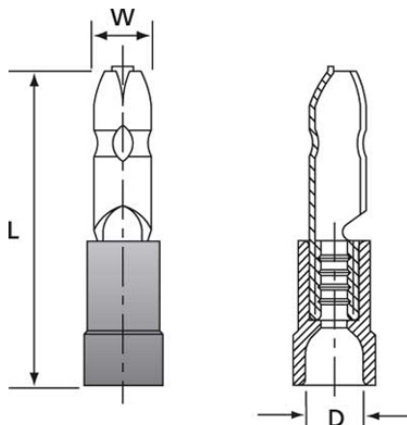

**T&B Catalog Number:**  
**EAN Number:**  
**UPC Number:**  
**Description:**

**RABM**  
05414363077428  
78621052893  
Bullet male disconnect, wire range 0.5 - 1.5 mm<sup>2</sup>, brass, red PC - Polycarbonate insulation

### Technical Information

Type	disconnect
Style	Bullet male disconnect
Material	brass
Plating	tin plated
Metal Barrel	brazed seam to prevent barrel separation
Insulation	PC - Polycarbonate
Temperature Resistance	+115°C / +125°C
Cable Insertion	easy entry funnel design
Flammability Rating	UL 94 V-2
Colour	red

### Ordering Information

Wire Range (mm <sup>2</sup> )	0.5 - 1.5
D (mm)	4
L (mm)	22
W (mm)	4
Quantity (pieces)	100
Weight (g/100)	102.0
Tooling	ERG2000KE, ERG2001A, WT2124Y