



TD-9411

**1Megapixel Network IR Weather-proof
Bullet Camera**


1Megapixel Network IR Weather-proof Bullet Camera



Features

- 720P real time coding
- Max. resolution: 1280 × 720
- Support PoE, audio
- Support ICR auto switch
- Support smart phone, iPad, remote monitoring
- 10~15m night view distance

Dimensions

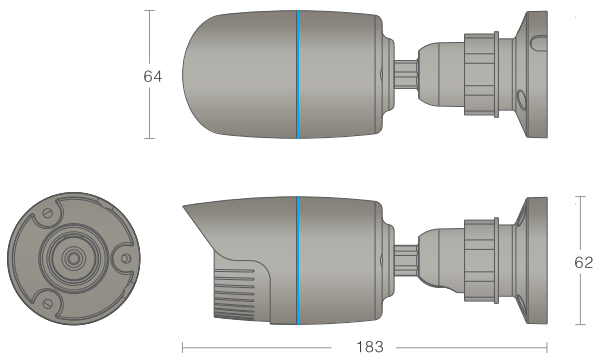

Specifications

Model	TD-9411-D/PE/IR1
Specifications	
Camera	
Image Sensor	1/3"CMOS
Image Size	1280 x 720
Electronic Shutter	1/25s ~ 1/100000s
Auto Iris	Fixed Iris
Min. Illumination	0lux (IR ON)
Lens	4mm (6mm/8mm, etc. option)
Lens Mount	M12
Image	
Compression	H.264
Resolution	720P(1280×720), VGA(640×480) QVGA(320×240), QQVGA(160×120)
Multi-stream	1280×720 (1 ~ 30fps)
	640×480 (1 ~ 30fps)
	320×240 (1 ~ 5fps)
Bit rate	128Kbps ~ 6Mbps
Encode Mode	VBR/CBR
Quality	Five levels under VBR; Free adjustment under CBR
Image Setting	Saturation, Brightness, Contrast, WDR
Audio Compression	G711A
Port	
Network	RJ45
Video Output	do not support BNC video output
Audio	MIC IN × 1
SD Card	No
RS485	No
Alarm Input	No
Alarm Output	No
Functions	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 4 users ; Support multi-stream real time transmission
Protocol	TCP/IP、UDP、DHCP、NTP、RTSP、PPPoE、 DDNS、SMTP、FTP
Storage	Network remote storage
Smart Alarm	Motion Alarm
Day&Night	ICR
PTZ	No
PoE	Yes
IR Distance	10~15m
Water-proof	IP66
Others	
Power Supply	DC12V/PoE
Power Consumption	2.6W
IR Consumption On	5.2W
Working Environment	-10℃ ~ 50℃, 10% ~ 90% humidity
Dimensions	Φ64mm×183mm
Weight(net)	423g
Weight(gross)	546g