




TD-9511M

**1.3 Megapixel Network Water-proof
Dome Camera**


1.3Megapixel Network Water-proof Dome Camera

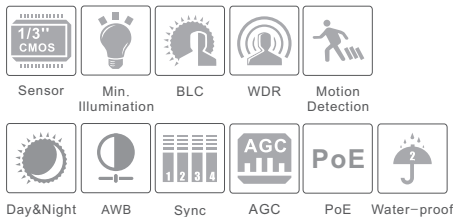

Features

- 960P full real time coding
- Max .resolution:1280x960
- 10-20m IR night view distance
- 3D DNR, digital WDR, defog and image stabilization
- Corridor mode optional
- ROI coding
- Broadband audio capture up to 192KHz for providing more details to track events
- One-way audio, PoE optional
- ICR auto switch, true day / night
- Support smart phone, iPad, remote monitoring
- NAT traversal

Dimensions

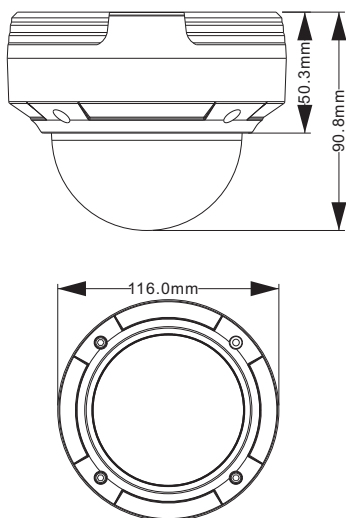

Specifications

Model			
Specifications	TD-9511M-D/IR1	TD-9511M-D/PE/IR1	TD-9511M-D/PE
Camera			
Image Sensor	1/3"CMOS		
Image Size	1280x960		
Electronic Shutter	1/25s~1/100000s		
Min. Illumination	0LUX(IR LED ON)		
Lens	4mm(6mm,8mm optional)		
Lens Mount	M12		
Wide Dynamic Range	Digital WDR		
Digital NR	3D DNR		
Image			
Video Compression	H.264		
Resolution	960P(1280x960), 720P(1280x720), VGA(640x480), QVGA(320x240)		
Multi-stream	1280x960(1~30fps) / 1280x720(1~ 30fps)		
	1280x720(1 ~10fps) / 640x480(1 ~ 30fps) / 320x240(1 ~30fps)		
Bit rate	64Kbps ~ 4Mbps		
Encode Mode	VBR/CBR		
Quality	Five levels under VBR; Freely adjustable under CBR		
Image Settings	Saturation, Brightness, Contrast, etc. adjustable through client software or web browser		
Audio Compression	G711A		
Interfaces			
Network	RJ45		
Audio	One-way audio(MIC IN x1)		
Functions			
Remote Monitoring	IE browsing,CMS remote control		
Online Connection	Support simultaneous monitoring for up to 4 users ; Support multi-stream real time transmission		
Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP,FTP		
Storage	Network remote storage		
Smart Alarm	Motion Alarm		
Day&Night	ICR		
PoE	NO	Yes	Yes
IR Distance	10-20m	10-20m	NO
Water-proof	IP66		
Others			
Power Supply	DC12V	DC12V/POE	DC12V/POE
Operating Environment	-40℃~50℃,10% ~90% humidity		
Dimensions	Φ116mm×91mm		
Weight (net)	605g		