



PTZ свързване на камери към пулт, ДУ AVC910R/AVC910T

Зелен

Червен



Към ДУ или пулт,
към камерата
кабелите са
разменени!

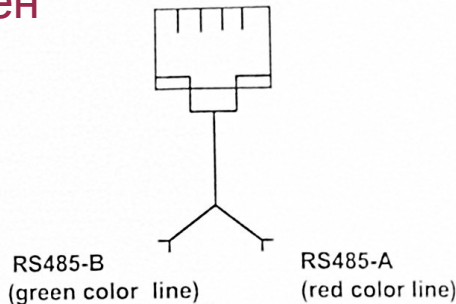

Note:

Connect "RS485-A(red color line)" to 11th aperture on DVR's Sub-D Plug, PTZ or Remote Switch.
Connect "RS485-B(green color line)" to 10th aperture on DVR's Sub-D Plug, PTZ or Remote Switch.

3


ADJUSTMENT AND SETTINGS

Turning On the Power of IR TRANSMITTER

- Press **DVR**, **CAMERA** and **Digital Zoom** button one by one to turn on IR Transmitter.
- IR Transmitter will turn off automatically after 8 minutes if there is no operation.
Please restart again.
- If IR Receiver receives IR signal, the indicator of IR Receiver will flash.


Step 1

1. Press "**DVR**" button.

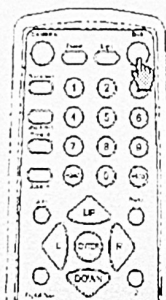


Step 2

2. Press "**CAMERA**" button.

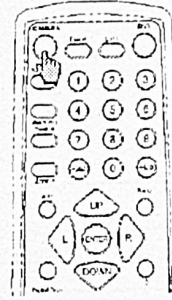

Step 3

3. Press "**Digital Zoom**" button.

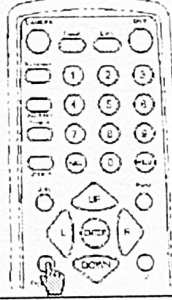

7


ADJUSTMENT AND SETTINGS

❖ID Setting – CAMERA

For example: Changing Camera ID from 001 to 003

Step 1

1. Press "CAMERA" button.

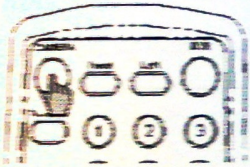


Step 2

2. Press "0" "0" "1".



Step 3

3. Press "ID" button.



Step 4

4. Press "0" "0" "3".



Step 5

5. Press "ENTER" button.



*Note :

- 1.If CAMERA ID is 8, please press "0" - "0" - "8" and "ENTER".
- 2.If CAMERA ID is 68, please press "0" - "6" - "8" and "ENTER".
- 3.If CAMERA ID is 168, please press "1" - "6" - "8" and "ENTER".
- 4.If CAMERA ID is 100 (or 200) , please press "+100" button(or "+200") and "ENTER".
- 5.The ID range is from 0 to 254.

If the setting is OK → when you press the "ID" button, the screen will show "CAMERA ID" at the same time.

Forget the ID

If you forget the ID(IR Receiver and Remote Switch)
→ you can press any three digits instead of Step2 and set the ID as default value "000".


8

ADJUSTMENT AND SETTINGS

❖Function : How to enter the main menu

Step 1

1. Press "CAMERA" button or "DVR" button.




Step 2

2. Press the ID number (0-254).




Step 3

3. Press "Menu" button and Menu list will be on the screen.

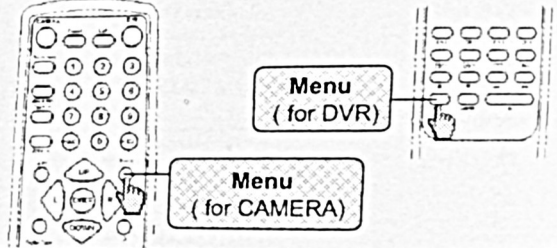

Step 4

4. Press "ENTER" button.



*Note :

- 1.If ID number is 8, please press "0" - "0" - "8".
- 2.If ID number is 68, please press "0" - "6" - "8".
- 3.If ID number is 168, please press "1" - "6" - "8".
- 4.If ID number is 100 (or 200) , please press "+100" button(or "+200").

По подразбиране ID:000
Baud rate: 2400