
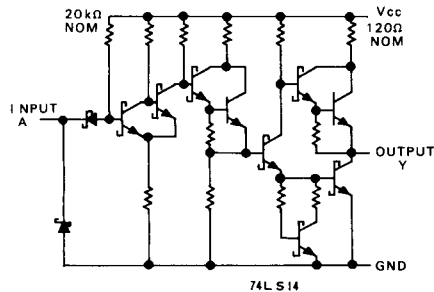
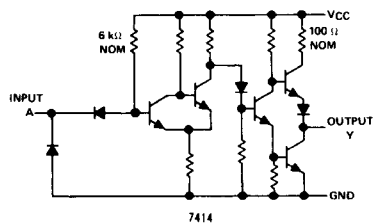


7414

Hex Schmitt Trigger Inverters



参考品種
7413
74132
7419

項目	大小	入力	出力	IN	OUT	N	LS	ALS	ALSK	F	S	AS	AC	ACT	HC	HCU	HCT	BC	BCT	単位
t _{pd}	max		L→H	↑	22	22	12			11.5			9.5	13.2	31		39			ns
t _{pd}	max		H→L	↓	22	22	10			9			9.5	8.6	31		39			ns
V _{T+}	typ					1.7	1.6			1.7			3.2	3.2	2.4		1.9			V
V _{T-}	typ					0.9	0.8			0.9			0.9	0.9	1.8		1.2			V
V _{T_def}	min					0.4	0.4			0.4					0.4		0.4			V
I _{cc}	max			H		36	16	12		25			0.04	0.04	0.02		0.02			mA
I _{cc}	max			L		36	21	12		25			0.04	0.04	0.02		0.02			mA
I _{IH}	max	ALL	H			40	20	20		20										μA
I _{IL}	max	ALL	L			1.2	0.4	0.1		0.6										mA
I _{IH+}	max	ALL	+			0.43	0.14	0.02												mA
I _{IH-}	max	ALL	-			0.56	0.18	0.1												mA
I _{OH}	max		Y	H		0.8	0.4	0.4		1					24	4		4		mA
I _{OL}	max		Y	L		16	16	8		20					24	4		4		mA

社名	N	LS	ALS	ALSK	F	S	AS	AC	ACT	HC	HCU	HCT	BC	BCT
日立	D	DF						DF		DF				
JRC									DF					
MOT		DF			DF			DF	DF	DF				
日電										DF				
NS	D	DF	DF		DF			DF		DF				
沖										D				
PHIL										DF		DF		
RCA								DF	DF	DF		DF		
三洋										DF				
SIGNE					DF									
TI	DF	DF						DF	DF	DF				
東芝	D							DFS	DFS	DF				